

PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

To:

CAMORIANO, Theresa, F.
Camoriano & Smith
8225 Shelbyville Road
Louisville, KY 40222
ETATS-UNIS D'AMERIQUE

Date of mailing (day/month/year)	04 August 1995 (04.08.95)
Applicant's or agent's file reference LLD.100	IMPORTANT NOTIFICATION
International application No. PCT/US94/11722	International filing date (day/month/year) 18 October 1994 (18.10.94)

1. The following indications appeared on record concerning:

☐ the applicant ☐ the inventor ☒ the agent ☐ the common representative

Name and Address CAMORIANO, Theresa, F. Camoriano & Smith P.O. Box 43610 Louisville, KY 40253-0610 United States of America	State of Nationality	State of Residence
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person ☐ the name ☒ the address ☐ the nationality ☐ the residence

Name and Address CAMORIANO, Theresa, F. Camoriano & Smith 8225 Shelbyville Road Louisville, KY 40222 United States of America	State of Nationality	State of Residence
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

☒ the receiving Office ☐ the designated Offices concerned
☐ the International Searching Authority ☒ the elected Offices concerned
☒ the International Preliminary Examining Authority ☐ other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer M. J. Devillard Telephone No. (41-22) 730.91.11
--	--

PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

NOTIFICATION CONCERNING
DOCUMENT TRANSMITTED

To:

United States Patent and Trademark
Office
(Box PCT)
Washington D.C. 20231
United States of America

in its capacity as elected Office

Date of mailing (day/month/year)

25 January 1996 (25.01.96)

International application No.

PCT/US94/11722

International filing date (day/month/year)

18 October 1994 (18.10.94)

Applicant

VIDEOLAN TECHNOLOGIES, INC. et al

The International Bureau transmits herewith the following documents and number thereof:

_____ copy of the international preliminary examination report-(Article 36(3)(a))

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

C. Carrié


Telephone No.: (41-22) 730.91.11

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

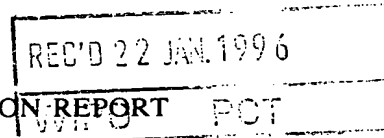

Applicant's or agent's file reference LLD.101P	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/US94/11722	International filing date (day/month/year) 18 OCTOBER 1994	Priority date (day/month/year) 20 OCTOBER 1993
International Patent Classification (IPC) or national classification and IPC IPC(6): H04N 7/14, 7/173 and US Cl.: 348/12		
Applicant VIDEOLAN TECHNOLOGIES, INC.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 3 sheets.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority. (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of — sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of report with regard to novelty, inventive step or industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 09 MAY 1995	Date of completion of this report 28 NOVEMBER 1995
Name and mailing address of the IPEA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer for DAVID E. HARVEY <i>Jan Hill</i> Telephone No. (703) 305-4365

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US94/11722

I. Basis of the report

1. This report has been drawn on the basis of *(Substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments):*

- ☒ the international application as originally filed.
- ☒ the description, pages 1-37 , as originally filed.
pages NONE , filed with the demand.
pages NONE , filed with the letter of _____.
pages _____ , filed with the letter of _____.
- ☒ the claims, Nos. 1-13 , as originally filed.
Nos. NONE , as amended under Article 19.
Nos. NONE , filed with the demand.
Nos. NONE , filed with the letter of _____.
Nos. _____ , filed with the letter of _____.
- ☒ the drawings, sheets/fig 1-21 , as originally filed.
sheets/fig NONE , filed with the demand.
sheets/fig NONE , filed with the letter of _____.
sheets/fig _____ , filed with the letter of _____.

2. The amendments have resulted in the cancellation of:

- ☒ the description, pages NONE .
- ☒ the claims, Nos. NONE .
- ☒ the drawings, sheets/fig NONE .

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the ~~Supplemental Box~~ Additional observations below (Rule 70.2(c)).

4. Additional observations, if necessary:

NONE

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US94/11722

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. STATEMENT**

Novelty (N)	Claims <u>1-13</u>	YES
	Claims <u>NONE</u>	NO
Inventive Step (IS)	Claims <u>1-13</u>	YES
	Claims <u>NONE</u>	NO
Industrial Applicability (IA)	Claims <u>1-13</u>	YES
	Claims <u>NONE</u>	NO

2. CITATIONS AND EXPLANATIONS

Claims 1-5 meet the criteria set out in PCT Article 33(2)-(4), because the prior art of record does not teach or fairly suggest a matrix switch which was configured so as to allow the bi-directional communication capability between respective ones of the recited user ports/connections, between the recited user ports/connections and the recited down channel ports/connections, and between the recited user ports/connections and the recited up channel ports/connections.

Claim 6 meets the criteria set out in PCT Article 33(2)-(4), because the prior art of record does not teach or fairly suggest a method for the simultaneous transmission of: 1) first and second analog signals in opposite directions on respective pairs of wires in a twisted pair cable; and 2) first and second digital signals in opposite directions on respective pairs of wires in said same twisted pair cable.

Claims 7-9 meet the criteria set out in PCT Article 33(2)-(4), because the prior art of record does not teach or fairly suggest a method in which the voltage level of a digital signal is attenuated prior to transmission via a first wire pair such that the digital signal does not cause interference in an analog signal being transmitted in the opposite direction on a second wire pair of a common twisted pair cable.

Claims 10-12 meet the criteria set out in PCT Article 33(2)-(4), because the prior art of record does not teach or fairly suggest a method of equalizing a signal sent over a twisted pair wherein the method included steps for boosting said signal via a plurality of circuits which were automatically engaged depending on the measured attenuation of a reference frequency sent over said twisted pair with said signal.

Claim 13 meets the criteria set out in PCT Article 33(2)-(4), because the prior art of record does not teach or fairly suggest a method for transmitting video signals and digital data signals simultaneously through the same crosspoint switch.

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark
Office
(Box PCT)
Washington D.C. 20231
United States of America

in its capacity as elected Office

Date of mailing:

18 July 1995 (18.07.95)

International application No.:

PCT/US94/11722

Applicant's or agent's file reference:

LLD.100

International filing date:

18 October 1994 (18.10.94)

Priority date:

20 October 1993 (20.10.93)

Applicant:

FENOUIL, Remy, L.

1. The designated Office is hereby notified of its election made:



in the demand filed with the International Preliminary Examining Authority on:

09 May 1995 (09.05.95)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer:

T. Zhao

Telephone No.: (41-22) 730.91.11

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference LLD. 100	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/US 94/ 11722	International filing date(day/month/year) 18/10/94	(Earliest) Priority Date (day/month/year) 20/10/93
Applicant VIDEOLAN TECHNOLOGIES, INC. et al.		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. ☐ Certain claims were found unsearchable (see Box I).

2. ☐ Unity of invention is lacking (see Box II).

3. ☐ The international application contains disclosure of a nucleotide and/or amino acid sequence listing and the international search was carried out on the basis of the sequence listing

☐ filed with the international application.

☐ furnished by the applicant separately from the international application,

☐ but not accompanied by a statement to the effect that it did not include matter going beyond the disclosure in the international application as filed.

☐ Transcribed by this Authority

4. With regard to the title, ☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is:

Figure No. ☐ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

☒ None of the figures.

INTERNATIONAL SEARCH REPORT

National Application No

PCT/US 94/11722

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/14 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	IEEE INFOCOM '92, PROCEEDINGS, vol.2, 1992, FLORENCE, IT pages 876 - 885	1,5
A	BIANCHINI ET AL. 'DESIGN OF A NONBLOCKING SHARED-MEMORY COPY NETWORK FOR ATM' see the whole document ---	2-4,6-13
Y	IEEE TRANSACTIONS ON COMMUNICATIONS, vol.39, no.8, August 1991, NEW YORK, US pages 1286 - 1274	1,5
A	YUM 'HIERARCHICAL DISTRIBUTION OF VIDEO WITH DYNAMIC PORT ALLOCATION' see the whole document --- -/--	2-4,6-13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

24 January 1995

Date of mailing of the international search report

1 0. 02. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Greve, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 94/11722

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	GB,A,2 094 592 (STANDARD TELEPHONES AND CABLES LIMITED) 15 September 1982 see page 1, line 5 - line 49 see page 2, line 84 - line 93 ---	10 1-4,6-8, 11,12
Y A	US,A,4 766 589 (FISHER) 23 August 1988 see abstract ---	10 11,12
A	REVIEW OF THE COMMUNICATIO LABORATORIES, vol.33, no.4, 1985, TOKYO, JAPAN pages 573 - 579 NAKAJIMA ET AL. 'BROADBAND SWITCHING SYSTEM' see the whole document ---	6-9,13
A	COMPUTER COMMUNICATIONS, vol.10, no.5, October 1987, LONDON, GB pages 256 - 262 BECKWITH 'LIVE-NET - AN INTEGRATED BROADBAND VIDEO AND DATA NETWORK' see the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

International Application No

Information on patent family members

PCT/US 94/11722

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2094592	15-09-82	CH-A- 658963	15-12-86
		DE-A- 3204191	19-08-82
		US-A- 4477914	16-10-84

US-A-4766589	23-08-88	GB-A- 2161676	15-01-86
		AU-B- 572669	12-05-88
		AU-A- 4427285	16-01-86
		BE-A- 902853	13-01-86
		CH-A- 668874	31-01-89
		JP-A- 61112449	30-05-86
		SE-B- 465346	26-08-91
		SE-A- 8503442	12-01-86



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/14, 7/173	A1	(11) International Publication Number: WO 95/11570 (43) International Publication Date: 27 April 1995 (27.04.95)
(21) International Application Number: PCT/US94/11722 (22) International Filing Date: 18 October 1994 (18.10.94) (30) Priority Data: 08/140,230 20 October 1993 (20.10.93) US (71) Applicant (for all designated States except US): VIDEOLAN TECHNOLOGIES, INC. [US/US]; Suite 620, 10101 Linn Station Road, Louisville, KY 40223 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): FENOUIL, Remy, L. [US/US]; 931 Lime Spring Way, Louisville, KY 40223 (US). (74) Agent: CAMORIANO, Theresa, F.; Camoriano & Smith, P.O. Box 43610, Louisville, KY 40253-0610 (US).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ). Published <i>With international search report.</i>
(54) Title: A LOCAL AREA NETWORK FOR SIMULTANEOUS, BI-DIRECTIONAL TRANSMISSION OF VIDEO BANDWIDTH SIGNALS (57) Abstract A local area network for the simultaneous, bi-directional transmission of video bandwidth signals includes an economical switching matrix.		

1
A LOCAL AREA NETWORK FOR SIMULTANEOUS, BI-DIRECTIONAL
TRANSMISSION OF VIDEO BANDWIDTH SIGNALS

BACKGROUND OF THE INVENTION

The present invention relates to local area
5 networks, and, in particular, to a local area network for
the simultaneous, bi-directional transmission of video
bandwidth signals.

Local area networks which can transmit video
bandwidth signals are known.

10 Figures 1-3 show some prior art networks. In Figure
1, there is a hub 10, which includes a central processor
and an NxN crosspoint switch, with N being the number of
user paths 18 (the number of inputs and the number of
outputs) to be connected to the hub 10. The NxN
15 crosspoint switch in the hub 10 permits all the users 12
on the hub 10 to communicate with each other, but it is
limited to N users.

Figure 2 shows one way in which the arrangement of
Figure 1 can be expanded to include more users. In that
20 arrangement, three users 12 have been removed from each
hub 10, and the other user ports have been used to
connect to other hubs 10 along the paths 14. In this
way, more users can be interconnected, but there is a
limit to the number of users that can be connected to
25 this system, because every time a new hub is added, a
user has to be subtracted from all the other hubs.

Figure 3 shows a way in which many hubs 10 can be
interconnected by connecting them to a bus 20 along the
paths 16. With this arrangement, a user 12A connected to
30 the hub 10A on the left can communicate with a user 12C
connected to the hub 10C on the right by transmitting a
signal along its respective path 18A to its hub 10A,
along the path 16A to the bus 20, where it occupies a
channel along the entire bus 20, which can be received by
35 a user 12C by passing along the path 16C to the hub 10C
and then to the user 12C. This arrangement is limited in
that, once all the channels on the bus 20 are used up, no
additional signals can be transmitted from hub to hub.

If a video conference is being conducted between a user 12A and a user 12C on channel 1, then users 12F and 12G (off the page to the right) cannot conduct another video conference on channel 1 at the same time.

5 The arrangement of Figure 3 is also severely limited in the number of connecting lines 16 between each hub 10 and the bus 20, so that, if there is only one connecting line 16A between the hub 10A and the bus 20, then only one channel of the bus 20 can be used by the users 12A at
10 any one time. This means that, if a user 12A is conducting a video conference with a user 12C on channel 1, then another user 12A cannot watch a video on another channel of the bus 20 at the same time. In order to provide more connecting lines to the bus 20, users 12
15 would have to be removed from the hub 10, which again limits the function of the network.

 Another problem with prior art networks is that, if they use twisted pair wiring, they are very limited in the distance over which they can carry signals before the
20 signal degrades to the point that it is not useful.

SUMMARY OF THE INVENTION

 The present invention provides a local area network for the simultaneous, bi-directional transmission of video bandwidth signals which is very versatile while
25 also being very cost-effective.

 The present invention provides a local area network which can be used for video-conferencing, for remote control and viewing of video tapes or video cameras, and so forth.

30 The present invention provides a local area network which permits channel segmentation, so that a signal may be stopped at a switching matrix and replaced by another signal which travels on the same channel to the next switching matrix. This permits greater flexibility than
35 does a typical bus, in which the same signal is transmitted to all users on a given channel.

The present invention also provides for the automatic equalization of signals to compensate for signal degradation, so that signals can be sent over twisted pair wiring for long distances.

5 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a view of a star configuration network, as known in the prior art;

Figure 2 is a view of another type of prior art network configuration;

10 Figure 3 is a view of a prior art bus network configuration;

Figure 4 is a view of a network made in accordance with the present invention;

15 Figure 5 is a schematic conceptualization of some of the switching capabilities of the network of Figure 4;

Figure 6 is a schematic conceptualization showing some of the switching capabilities of the network of Figure 4;

20 Figure 7 is a schematic showing a preferred embodiment of the switching matrix of the present invention;

Figure 7A is the same schematic as Figure 7 but with the central processor (CPU) shown with its connections to the switches in the matrix;

25 Figure 8 is a schematic showing how the switching matrices of Figure 7 can be interconnected to add more upstream and downstream channels;

30 Figure 9 is a schematic of the circuitry a signal passes through as it leaves the hub of Figure 4 over twisted pair wiring;

Figure 10 is schematic of the circuitry a signal passes through as it arrives at the hub of Figure 4 over twisted pair wiring;

35 Figure 11 is a schematic showing the preferred embodiment of how a signal travels in the network of the present invention from one twisted pair termination

module to another over twisted pair wiring;

Figure 12 is a schematic showing the flow of video, audio and data signals from a user interface, through a hub (including the switching matrix), to another user interface;

Figure 13 is a schematic showing the flow of video, audio, and data signals directly from user interface to user interface;

Figure 14 is a schematic of another embodiment of the present invention showing the flow of audio, video, and data signals from a user interface, through a hub, to another user interface;

Figure 15 is a schematic showing the matrix switching system in the hub of Figure 14;

Figure 16 is a schematic showing the details of the user switching system portion of Figure 15;

Figure 17 is a schematic showing the details of the channel switching system portion of Figure 15;

Figure 18 is a schematic showing the details of the channel twisted pair line interface portion of Figure 15;

Figure 19 is a schematic showing the details of the frequency coupler and the common-to-differential-mode converter of Figure 14;

Figure 20 is a schematic showing the reception portion of the twisted pair termination module, the frequency separator, and the frequency-shift keying demodulator of Figure 14;

Figure 21 is a schematic of another embodiment of the present invention showing the flow of audio, video, data and high speed digital data signals from a user interface, through a hub, to another user interface;

Figure 22 is a schematic of still another embodiment of the present invention which is similar to the embodiment of Figure 21 except that the high speed digital data goes through the same matrix switching system as the audio, video, and data;

Figure 23 is a schematic of still another embodiment

of the present invention showing the flow of two sets of audio, video, and data signals directly from a user interface to another user interface;

Figure 24 is a schematic of still another embodiment of the present invention showing the flow of audio, video, data and high speed digital data signals directly from a user interface to another user interface with an external digital interface; and

Figure 25 is a schematic of still another embodiment of the present invention showing the flow of audio, video, data and high speed digital data signals directly from a user interface to another user interface with an internal digital interface.

DESCRIPTION OF THE PREFERRED EMBODIMENT

An example of a first embodiment of a network made in accordance with the present invention is shown in Figure 4. In that arrangement are shown several switching hubs 100 A through F. Each hub 100 has several users 102, which are connected to their hub 100 along paths 104. Each hub 100 includes a central processor and a plurality of crosspoint switches interconnected to form a matrix, which will be described in more detail later. In the preferred embodiment, the hubs 100 also do some treatment of the signals, as will be described later.

The arrangement shown in Figure 4 has the ability to continue to add more users by adding more hubs along an internodal pathway 106. The internodal pathway 106 permits the addition of more hubs, as does the bus 20 of Figure 3, but it has the added advantage that, because of the functionality of the switching matrix inside each hub 100, it can segment the channels which are carried by the pathway 106, so that the signal carried on channel 1 along the internodal path 106AB, between the hubs 100A and 100B, may be different from the signal carried on channel 1 along the internodal path 106BC, between the hubs 100B and 100C. This means that each channel can

carry a variety of signals along its length, thereby greatly increasing the number of signals that can be carried by a given size of network. In addition to the internodal pathway 106, there is also an internodal digital link 103 between hubs 100 for carrying digital signals. The purpose of the internodal digital link 103 will be explained in more detail later.

In the prior art network shown in Figure 2, each connection from one hub to another is the same as a user connection. Thus, if a hub is adapted to be connected to ten other hubs and to six users (sixteen inputs and sixteen outputs), that hub must include a 16 x 16 crosspoint switch (with 256 switching points).

In the prior art network shown in Figure 3, if the bus 20 carries 64 channels, each hub 10 has access to all 64 channels, and each hub 10 has the capacity to handle sixteen users, then, according to the teachings of the prior art, the hubs 10 must each have a crosspoint switch of $(16 + 64) \times (16 + 64)$, (80 inputs by eighty outputs), or a switch having 6400 switch points in it.

The matrix switch in the hub 100 of the present invention differs from the prior art in that it defines users, upstream paths, and downstream paths and provides the switching to make those paths function optimally while minimizing the number of switching points. The upstream paths and downstream paths are the internodal paths 106, shown in Figure 4. For example, for the matrix 100C, the upstream path may be the path 106BC, and the downstream path may be the path 106CD. The users are the users 102C. As shown in this figure, a user 102 includes a user interface and whatever external devices are connected to the user interface, such as a multimedia computer terminal, a video camera, a video recorder, an audio tape recorder, a video monitor, or any other device which originates or receives signals. There may also be a source 120 at the head end of the network or at some internodal path 106 in the network for bringing such

things as cable television channels into the network. There are also digital ports on each hub 100, permitting the hubs 100 to be interconnected by the data link 103 in addition to the internodal paths 106.

5 Figures 5 and 6 summarize the switching capabilities of the matrix of switches inside the hub 100B. Looking first at Figure 5, for any given user 102B (let's say user 102B-1) connected directly to the hub 100B, when the user 102B-1 is transmitting a signal into the hub 100B, 10 the matrix of switches inside the hub 100B performs three independent types of switching functions for that signal. It can send the signal to any one or more of the upstream paths 106AB or not send the signal to any of the upstream paths (a first type of switching function). It can send 15 the signal to any one or more of the users 102B connected to the same hub 100B or not send the signal to any of the users 102B on the same hub (a second type of switching function). Third, it can send the signal to any one or more of the downstream paths 106BC or not send the signal 20 to any of the downstream paths. These three switching functions are independent, so that the user 102B-1 may be doing all three things at the same time -- i.e., sending the same signal to other users on the same hub, sending the signal upstream, and sending the signal downstream. 25 Any of those switching functions can be on or off at any given time for any given user.

Figure 6 shows when that user 102B-1 is receiving a signal from the hub 100B. Again, it shows three 30 different switching functions. The user 102B-1 may be receiving a signal from any one of the other users, may receive a signal from any upstream path, or may receive a signal from any downstream path. While these switching functions are also independent, the intelligence of the central processor (CPU) in the hub 100B will only allow a 35 single user path to receive a signal from one source at a time to avoid mixing of signals.

The arrangement shown in Figures 5 and 6 is true for every user 102B connected to the hub 100B, so that there are effectively bi-directional on-off switches between every user 102B and every other user 102B, between every user 102B and every upstream path 106AB, and between every user 102B and every downstream path 106BC. The effect of these three different switching functions in a single matrix of switches is channel segmentation. This means that a signal coming into the hub 100B from a downstream path can be stopped at the hub 100B and replaced by a signal from a user 102B, for example. This is not possible in the prior art bus configuration of Figure 3. It would be possible in a network such as that shown in Figure 2, but that network is necessarily severely limited in size due to its structure.

For example, in the present invention, for a user 102A to communicate with a user 102C will tie up one channel along the paths 106AB and 106BC, but that channel will again be open in the other internodal pathways, such as 106CD, 106DE, 106EF, and so forth, so that same channel could also be used by a user 102D to communicate with a user 102F, for example.

In the prior art bus arrangement of Figure 3, there is no distinction between upstream paths and downstream paths at the hub. With the bus 20, from each hub 10 there is only an upstream path or a downstream path -- not both. The switch in the hub 10B in Figure 3 can send signals to the bus 20 and receive signals from the bus 20. It cannot stop a signal travelling along the bus 20 or replace a signal travelling along the bus 20 with a different signal. The ability to segment channels gives the present invention much greater flexibility for a fixed size of internodal pathway 106 and a fixed size of switching matrix 100.

For example, in one embodiment of the present invention, each hub 100 is capable of connecting to 16 different users, to 64 upstream paths, and to 64

downstream paths. In the prior art bus arrangement, if there were 64 different paths on the bus 20, that would be the maximum number of signals that could be transmitted throughout the network. However, in the present invention, many more than 64 different signals can be transmitted along the network at any given time, because the 64 paths 106AB between the hubs 100A and 100B may be carrying different signals from those carried by the 64 paths 106BC between the hubs 100B and 100C, which again may be different from the signals carried along the 64 paths between the hubs 100C and 100D along the 64 paths 106CD. Thus, the channel segmentation which is made possible by the switching matrices in the hubs 100 of the present invention greatly increases the capacity of a given size of signal-carrying hardware over the prior art bus arrangement.

If the prior art hubs 10 of Figure 3 were made so that they could segment the channels going along the bus 20, then, in accordance with the teachings of the prior art, which are that there must be an NxN crosspoint switch, with N being the number of paths into and out of the hub, each hub would have to include a much larger crosspoint switch, making it too expensive. For example, looking at the network in Figure 3, if each hub 10 were made to handle 16 users and the hub 20 were made to carry 64 channels upstream and 64 channels downstream, then the crosspoint switch in the hubs 10 would have to be $(16 + 64 + 64) \times (16 + 64 + 64)$, or a crosspoint switch having 20,736 switch points. The preferred embodiment of the present invention shown in Figure 7, however, by defining upstream ports, downstream ports, and user ports and arranging a plurality of crosspoint switches to meet the necessary functionality of that arrangement, requires only eight boards, each having six 8×16 crosspoint switches, or 6144 switching points (a reduction in the number of switching points of approximately 70%). This will be described in more detail below.

Each matrix box or hub 100 in the preferred embodiment of the present invention shown in Figure 4, includes a central processor and includes functions in addition to the switching functions described above, and those functions will be described in detail later. For now, we will look in more detail specifically at the switching function of the matrix boxes or hubs 100. In the preferred embodiment of the present invention shown in Figure 4, each matrix box or hub 100 includes several of the switching matrices 200 shown in Figure 7. The switching matrix 200 shown in Figure 7 is configured to communicate with eight bi-directional upstream paths 202 (Channels 1-8), with eight bi-directional downstream paths 204 (Channels 1-8), with 16 user input paths 206 (TX Users 1-16), and with 16 user output paths 208 (RX User 1-16). The matrix 200 and all the paths are configured to be able to handle a video bandwidth.

A preferred embodiment of the switching matrix 200, as shown in Figure 7, includes six 8x16 crosspoint switches 210, 212, 214, 216, 218, 220. An example of a crosspoint switch which may be used is Harris model CD22M3494. Each crosspoint switch has eight Y coordinates and sixteen X coordinates as well as connecting pins for connecting to a central processor, which controls the switch. The upstream crosspoint switch 210 in the upper left corner of Figure 7 has its Y coordinates connected to eight bi-directional upstream channels (corresponding to an internodal pathway 106), its first eight X coordinates (X0-X7) connected to eight left-to-right paths 211, and its second eight X coordinates (X8-X15) connected to eight right-to-left paths 213.

The downstream crosspoint switch 212 in the upper right corner of Figure 7 similarly has its Y coordinates connected to eight bi-directional downstream paths 204 (corresponding to another internodal pathway 106). Its first eight X coordinates are connected to the eight

left-to-right paths 211, and its second eight X coordinates are connected to the eight right-to-left paths 213. The direction of the sixteen paths between the upstream and downstream crosspoint switches 210, 212 is defined by a plurality of amplifier/buffers 222, such as Comlinear model CLC 414 or Linear Technology model LT 1230.

The first transmit crosspoint switch 214 has its Y coordinates connected to the eight left-to-right paths 211 between the upstream and downstream crosspoint switches 210, 212, and its X coordinates connected to the sixteen user inputs 206 (TX User 1-16). The user input signals are treated between the time they reach the hub 100 and the time they get to the user input points 206, as will be described later.

The second transmit crosspoint switch 220 has its Y coordinates connected to the eight right-to-left paths 213 between the upstream and downstream switches 210, 212 and its X coordinates connected to the 16 user input points 206 (TX User 1-16).

The first receive crosspoint switch 216 has its Y coordinates connected to the eight right-to-left paths 213 and its X coordinates connected to the sixteen output points to the users 208 (RX User 1-16). Again, the signals going to the users will be treated between the time they leave the output points 208 and the time they get to the user output ports on the hub 100, as will be described below.

The second receive crosspoint switch 218 has its Y coordinates connected to the eight left-to-right paths 211 and its X coordinates connected to the sixteen output points to the users 208 (RX User 1-16).

As was explained before, there are several switching possibilities for every signal coming into and leaving the matrix 200. Some examples are listed below:

1. A signal coming from a user and going to another user.

Let us assume that User 1 is sending a signal to the matrix 200. That signal arrives at the TX User 1 point, which is in communication with the XO pin of the first transmit switch 214 and with the XO pin of the second transmit switch 220. The signal can get to another user by passing through either of the transmit switches 214, 220. If it goes through the first transmit switch 214, it will end up on one of the left-to-right paths 211, will then go through the second receive crosspoint switch 218, and then to the selected user through that user's RX User point. If it goes through the second transmit switch 220, it will end up on one of the right-to-left paths 213, will go into the first receive switch 216, and then out to the selected user through that user's RX User point. If it is desired to send that signal to more than one user, then the appropriate receive switch 216 or 218 can connect a signal on a single left-to-right or right-to-left path with multiple RX User points.

2. A signal coming from a user and going to an upstream path.

Again, User 1 is sending a signal to the matrix box 100, and that signal is treated and then received at the TX User 1 point. In order for that signal to get onto an upstream path, it must pass through the second transmit switch 220, which puts the signal on a right-to-left path 213, where it enters one of the X8-X15 pins of the upstream switch 210 and leaves by one of the Y pins of that switch to an upstream channel on an internodal path 106. Of course, the upstream switch 210 could be commanded to send that same signal to more than one upstream channel, if desired, although that is not likely, since upstream paths are to be conserved. Also, the signal coming from User 1 could be going to an upstream path at the same time that it is going to

another user as was described in #1 above.

3. A signal coming from a user and going to a downstream path.

The signal coming from User 1 would have to pass through the first transmit switch 214, so that it ends up on a left-to-right path 211. It then reaches one of the X0-X7 pins of the downstream switch 212 and leaves that switch 212 through one of the Y pins.

4. A signal coming from an upstream path and going to a user.

A signal coming from Channel 1 of the upstream path arrives at the upstream switch 210 through one of the Y pins and leaves through one of the X0-X7 pins onto a left-to-right path 211. It is then received by the second receive switch 218, where it enters through one of the Y pins of that switch. It then leaves that switch through one or more of the X pins to one or more of the users through the RX User points 208. Again, this signal can be received by one or more users at the same time that User 1's signal is going through the matrix 200. For example, User 1 may be receiving a signal from an upstream path at the same time that it is transmitting signals into the matrix, or User 2 may be receiving User 1's signal at the same time that User 3 is receiving an upstream signal. However, the software will prevent user 2 from receiving signals from two different sources at once.

5. A signal coming from an upstream path and going to a downstream path.

Taking the same channel 1 input to the upstream switch 210, it will again leave the upstream switch 210 through one of the first eight X pins (X0-X7), will get on one of the left-to-right paths 211, and will enter the downstream switch 212 through one of its first eight X pins (X0-X7), and will leave through one of the Y pins of the downstream switch 212 to one of the downstream channels 204. It may leave through pin Y0 as Channel 1,

or it may leave through another pin as another channel. Again, this shows how channel segmentation can work to increase the capacity of the system. A signal coming into the matrix 200 as Channel 1 may leave as some other channel, freeing up the Channel 1 path in the downstream portion of the network for some other purpose.

5 **6. A signal coming from a downstream path and going to a user.**

10 A signal comes from Channel 5 of the downstream path and enters the downstream switch 212 through the pin Y4. It leaves the downstream switch 212 through one of the second eight X pins (X8-15) and gets onto a right-to-left path 213. It is received by the first receive switch 216 and is then transmitted to one or more of the users by leaving one or more of the X pins of the receive switch 216 to the appropriate user point(s) 208.

15 **7. A signal coming from a downstream path and going to an upstream path.**

20 A signal comes from Channel 5 of the downstream path and enters the downstream switch 212 through the pin Y4. As in the previous example, it leaves the downstream switch 212 through one of the pins (X8-15) and gets onto a right-to-left path 213. It is received by the upstream switch 210 at one of the pins (X8-15) and leaves through one of the Y pins.

25 Figure 7A shows the same matrix 200 as does Figure 7, but it also shows the central processor and its digital control connections to the analog crosspoint switches in the matrix 200.

30 In the matrix box or hub 100 are a plurality of these matrices 200, interconnected as shown in Figure 8. The same TX User points 206 communicate with all the matrices 200 in the box 100, and the same RX User points 208 communicate with all the matrices 200 in the box 100. Each matrix 200 connects to eight different up channels 202 (creating part of an internodal path 106 which will go to another matrix box) and to eight different down

35

channels 204 (creating part of another internodal path 106 to a different box), so that, by stacking the matrices 200, the box 100 can handle more channels. In one of the preferred embodiments, there are eight of these matrices 200 stacked to permit communication with 64 upstream channels 202 and 64 downstream channels 204.

In the first preferred embodiment, analog video signals are switched on one set of matrices 200, and analog audio signals are switched on a different set of matrices 200, so, for simultaneous, bi-directional transmission of audio and video among 16 users and 64 channels, there are eight interconnected matrices 200 for the video signals and eight interconnected matrices 200 for the audio signals in a single box 100. All the matrices 200 in a single box 100 are controlled by the central processor for that box 100.

Looking at Figure 4 again, between every user 102 or source 120 and the network is a user interface (part of 102). In the preferred embodiment, signals travel along the internodal paths 106 in common mode. Signals travel from the hub 100 to users 102 along the pathways designated as 104, which are preferably twisted pair cable. It is also possible for signals to travel directly from one user interface 102 to another user interface 102 over twisted pair cable. In the present invention, when signals are sent over twisted pair wiring, they are sent in differential mode, so the user interfaces 102 and the matrix boxes 100 convert outgoing signals from common mode to differential mode before sending the signals out over twisted pair wiring and convert signals from differential mode to common mode when receiving signals from twisted pair wiring.

It is anticipated that the wiring 104 (referring to Figure 4) between the user interface 102 and the hub 100 would include four twisted pairs of wire, preferably terminating in an RJ45 connector with eight pins. In the preferred embodiment, pins 1 and 2 transmit audio with

control data, pins 4 and 5 transmit video, pins 3 and 6 receive audio with control data, and pins 7 and 8 receive video. Thus, in this way, simultaneous, bi-directional, real-time audio, video, and data signals can be carried in one eight-wire twisted pair cable. In the preferred embodiment, the internodal pathways 106 with 64 bi-directional common mode audio and video channel transmission capability are made up of 128 cables.

For ease of explanation, we will refer to the portions of the user interface boxes 102 and of the matrix boxes 100 which take care of this signal conversion as twisted pair termination modules 350. It would also be possible for these termination modules 350 to function independently, outside of the boxes 100, 102, as required. Figure 11 shows two twisted pair termination modules 350 and the manner in which they handle signals.

Signal coming in from external device:

Referring now to Figure 11, there are two twisted pair termination modules 350 connected together by twisted pair wiring 316. At the top left portion of the upper twisted pair termination module 350 is a system input 300. This is an input in common mode (for example, a standard single-ended NTSC signal). It may be coming from a video camera, a cable television channel, a microphone, or another source. The signal goes through a video buffer 310, is converted to differential mode by a converter 312, goes through a differential mode line driver 314, which is an operational amplifier, and then out over the twisted pair wiring 316. The circuitry which performs these functions is shown in Figure 9 and is described later.

Signal coming in from twisted pair wiring:

Following that twisted pair wiring 316 to the left side of the lower twisted pair termination module 350, we see the process that occurs when a differential signal is received at that module 350. First, the signal is converted from differential mode to common mode at a converter 318. It goes through an equalization circuit 320 to compensate for signal degradation, it goes through a common mode video driver 322, and then out to an external output 324. The circuitry which performs these functions is shown in Figure 10 and is described later.

Because of the equalization circuit 320, it is possible to have simultaneous, bi-directional signals passing through two twisted pairs in the same cable. The present invention has overcome the problems of signal degradation and cross-talk that plagued prior art devices.

The right-hand side of Figure 11 is the same as the left-hand side but reversed. Looking at the lower right hand corner of the lower twisted pair termination module 350, there is again a system input 300, which goes through a video buffer 310, through a converter 312 which converts the signal from common mode to differential mode, through a differential mode line driver 314, and out over the twisted pair wiring 316. When the differential signal is received over the twisted pair wiring 316 on the right side of the upper module 350, it is converted from differential mode to common mode at the converter 318, the signal is equalized 320, and the signal passes through a common mode driver 322 to an output 324, which may be a video monitor, a speaker, and so forth. It can be seen in Figure 11 that the equalization circuits are digitally controlled. This control would preferably come from the central processor in the box in which the circuitry is located.

Figure 9 shows the circuit that is used for signals which come in in common mode and go out in differential

mode over twisted pair wiring. It functions as follows:
The signal enters at the port 300 (corresponding to the
system input 300 in Figure 11), and passes through the
operational amplifier A1, which provides signal level and
impedance matching with the external system. The second
operational amplifier A2 is wired as an inverter and
generates the negative component of the differential
signal, while driving the line through an impedance
matching resistor. The third operational amplifier A3 is
wired as a non-inverting driver, and generates the
positive component of the differential signal, while
driving the line through an impedance matching resistor.
The negative component of the differential signal leaves
at the point 252 onto one of the twisted pair wires 316,
and the positive component of the differential signal
leaves at the point 254 onto the other of the twisted
pair wires 316. Figure 10 shows the circuit that is used
for signals coming into the twisted pair termination
module 350 as differential signals over twisted pair
wiring 316 and leave in common mode. It functions as
follows: The differential signal arrives on two twisted
pair wires 316 at the points 256, 258. The operational
amplifier A5 provides impedance matching with the input
resistors, signal level matching, amplitude/frequency
compensation (equalization), and conversion of the
differential signal to a common mode signal. The cells
C1 to C15 are composed of passive circuits and are used
by the A5 amplifier to provide amplitude/frequency
compensation (equalization). Each cell is tuned to a
specific length of twisted pair wire. The central
processor knows the length of the twisted pair wire 316
coming to the points 256, 258 and digitally controls the
analog multiplexers DC1 and DC2, which pilot the cells C1
to C16 to provide the proper compensation for that
length. Amplifier A4 is the output driver, which
interfaces with the external system.

Figure 12 is a schematic view which helps clarify

how the twisted pair termination modules 350 function in the user interfaces 102 and the matrix boxes 100 and how audio, video, and data signals travel throughout the network of Figure 4. To help see what is upstream and what is downstream, the matrix box or hub in Figure 12 is labelled as box 100C, the upstream channels are in the path 106BC, going to the hub 100B, and the downstream channels are in the path 106CD, going to the hub 100D. Two users 102C1 and 102C2 are shown, each connected by two pairs of twisted pair wiring to the hub 100C. Of course, every one of the users 102C connected to the hub 100C would have a similar connection.

Transmission of video signal through the network:

Let's look first at the upper left-hand portion of the user interface 102C1, where there is video input to the user interface 102C1 at the point 400. This video input is in common mode. It may be coming from a video camera, cable television, or a video recorder, for example, over coaxial cable. The analog video signal is routed through a twisted pair termination device 350, which has been described with reference to Figures 9, 10, and 11. The video signal then leaves the termination device 350 at the point 402 as a differential signal. It travels over the twisted pair 404 and is received at a user input port 406 of the hub 100C, where it is routed through another twisted pair termination device 350, which converts the signal to common mode and equalizes the signal. The video signal then arrives at a TX User point at the matrix 200V, which is the same as the matrix 200 which was described with respect to Figure 7. The video signal is switched through the matrix 200V, with the central processor of the box 100C closing switch points in the crosspoint switches as needed to route the signal in the correct direction. If the signal is going to an upstream channel 106BC, no further signal treatment is done, and the signal leaves the box 100C via one of the upstream channel ports. Similarly, if the signal is

going to a downstream channel 106CD, no further signal treatment is done, and the signal leaves the box 100C via one of the downstream channel ports. If the signal is to go to another user connected to the box 100C, such as user 102C2, shown on the right of the hub 100C, then the signal leaves the matrix 200V through the appropriate RX User point and passes through another twisted pair termination module 350, where it is converted to differential mode and sent out over the twisted pair 408. The signal is received at the user interface 102C2, goes through another twisted pair termination module 350, where it is converted back to common mode, is equalized, and leaves the user interface 102C2 through the port 410 to a video recorder, video monitor, or other device for receiving video signals.

Transmission of audio and data signals through the network:

Looking again at the left-hand side of the first user interface 102C1 in Figure 12, an analog audio signal enters the user interface at the port 420. This would actually be two audio signals, left and right stereo, coming in from a video camera with sound, an audio or video tape recorder, or other audio source in common mode. Also, data may be input to the user interface 102C1 at four different points. System control data in the form of infrared remote control signals can enter through the IR window 422. Other digital control data, such as mouse or keyboard commands, can be input via the ports 424 or 426. It is also possible to input external carrier frequencies through the port 428.

The left and right audio signals coming in at the port 420 are frequency modulated at the frequency modulator (FMM). System control data coming in through ports 422, 424, or 426 is first routed through the central processor for the user interface (CPU) and then, in the form of a digital signal to the frequency shift key modulator (FSK M), which sends it on to the frequency

coupler (FC). The frequency coupler couples the audio signals with the data signal. If a signal has come in through the external carrier frequency port 428, that signal goes directly to the frequency coupler (FC), where it is coupled together with the audio and control data. This common mode audio/data signal then goes into a twisted pair termination module 350, where it leaves over the twisted pair 430 in differential mode and arrives at the hub 100C. It goes through another twisted pair termination module 350, where it is converted to common mode. This combined audio/data signal then goes through a frequency shift key separator (FSK S), where the system control data (which came into the user interface 102C1 through the ports 422, 424, or 426) is stripped off as a digital signal and routed to the central processor (CPU) of the hub 100C, which controls the audio and video matrices 200A and 200V in the hub box 100C. The multiplexed audio/external carrier frequency signal passes through the audio matrix 200A and can go to up channels via the internodal path 106BC, to down channels through the internodal path 106CD, or to users 102C connected to the same box 100C by going to the frequency shift key coupler (FSK C) 442.

The central processor (CPU) acts on the digital control signal it receives from the frequency shift key demodulator (FSK D) and on any digital signals it receives from upstream and downstream digital links 103. If the control signal is a routing signal, for example, indicating that the user at 102C1 wants to set up communication with the user at 102C2 and with upstream users and downstream users, the CPU controls the necessary video and audio matrix switches in its own box 100C to set up those routes. It will also send signals to the CPUs of upstream matrix boxes (such as 100 A and B) and downstream matrix boxes (such as 100 D and E) via the appropriate digital links 103 in order to cause those CPUs to close the appropriate switches in their matrix

boxes 100 for routing to more distant users. If the CPU at the box 100C receives a digital control signal from another user 102C or from an upstream or downstream box via the data link 103, or if the CPU at the box 100C generates its own signal which should be passed on to a user 102C at the box 100C (such as a signal to control the user interface 102C2 or the video camera connected to user interface 102C2), it will send the control signal or signals through a frequency shift key modulator 440 (FSK M), which sends the information on to the frequency shift key coupler (FSK C) 442, where the information signal component is multiplexed with the signals leaving the audio matrix 200A toward the user interface 102C2. It is clear from the foregoing description that the control data does not travel through the matrix with the audio signals and the external carrier frequencies. This allows isolating the system control data signal on its arrival at the hub 100C. The original signal is read, its instructions are carried out, and that signal is terminated. The CPU then reformats the signal or generates its own signal and, if necessary, forwards the outgoing control signal in the appropriate direction. The combined audio/data signal leaving the frequency shift key coupler 442 again goes through a twisted pair termination module 350, leaves the hub 100C via an output port, over the twisted pair 450 to the user interface 102C2, where the analog audio/data signal goes through the receiving side of another twisted pair termination module 350, on to a frequency separator (FS) 452, which separates out the control signal onto the path 454, separates out the external carrier frequency onto the path 456, and sends the multiplexed audio signal out onto the path 458. The external carrier frequency leaves the user interface 102C2 with no further signal treatment. The multiplexed audio signal is demultiplexed by the frequency modulation demodulator 460 and leaves as separate left and right audio signals. The control data

on the path 454 then passes through a frequency shift key demodulator (FSK D) which puts it back into digital form and then to the CPU for the user interface 102C2. The CPU then sends any control signals which need to go out to a device via one of the digital input/output ports RS-232A, RS-232B, or the infrared window IR.

It will be clear from the above description that this is a bi-directional network, so, for example, the second user interface 102C2 can send signals out in the same way the first user interface 102C1 did, and the first user interface 102C1 can receive signals in the same way that the second user interface 102C2 did. Similarly, signals may come into the matrix box 100C from upstream and downstream in the same manner that they leave.

Figure 13 shows a direct connection between user interfaces 102. These user interfaces 102 stand alone and are not connected to any hub. Since this is simply a point-to-point transmission, no switching is required. In this case, the video signal is converted from common mode to differential mode to go over the twisted pair wiring between the user interfaces 102 and then back to common mode upon reception. The audio signals are multiplexed and combined with the data signals. The combined audio/data signal is converted to differential mode for transmission over twisted pair. Upon reception over twisted pair, the combined audio/data signal is converted back to common mode, the data is separated out, and the audio is demultiplexed.

New Embodiment

Another embodiment of a switching matrix made in accordance with the present invention is shown in Figure 14. Figure 14 shows a hub 750 and two users 530C1 and 530C2 connected to the hub 750. "Up" Channels 860 and "Down" Channels 870 from the switching matrix 500 permit the hub 750 to be connected to other hubs. In this

preferred embodiment, there are 16 user paths 830 toward the hub 750, 16 user paths 880 away from the hub, eight bi-directional "up" channels 860 and eight bi-directional "down" channels 870. (Only two users are shown in Figure 14, but the preferred embodiment contemplates sixteen users being connected to the hub.) The switching matrix 500 in the hub 750 of Figure 14 accomplishes essentially the same functions as the matrix 200 of Figure 7, but with fewer switch points.

If the prior art hubs 10 of Figure 3 were made so that they could segment the channels going along the bus 20, then, in accordance with the teachings of the prior art, which are that there must be an NxN crosspoint switch, with N being the number of paths into and out of the hub, each hub would have to include a much larger crosspoint switch, making it too expensive. For example, looking at the network in Figure 3, if each hub 10 were made to handle 16 users and the bus 20 were made to carry 8 channels upstream and 8 channels downstream, then the crosspoint switch in the hubs 10 would have to be $(16 + 8 + 8) \times (16 + 8 + 8)$, or a crosspoint switch having 1,024 switch points. The embodiment of Figure 14 has three 8x16 crosspoint switches 3(8x16) and 16 two-way switches 16(2x1) to accomplish the same function, or 416 switching points. This is less than half the switching points that would be required by an NxN crosspoint switch.

Combined audio, video and data signals can be transmitted from the user interfaces 530C1 and 530C2 to the matrix system 500 of the hub 750 along the user-to-hub paths 830 where they can go to another user along a hub-to-user path 880 or can go out on an up channel 860 or on a down channel 870. Signals can come in to the matrix system 500 on an up channel 860 and can go out to a user 530C1 or 530C2 or can go out on a down channel 870. Signals can also come in to the matrix system 500 on a down channel 870 and go out to a user 530C1 or 530C2 or go out on an up channel 860. All of the switch points

in the matrix system 500 are digitally-controlled by the central processing unit (CPU) 700. A user controls the switching and the routing of the signals in the system by inputting commands from the keyboard. These commands travel along a user path 830 to the hub 750, where they are interpreted, causing the CPU 700 to give the appropriate command to the matrix switching system 500.

The matrix switching system 500 is shown in greater detail in Figure 15. The matrix switching system 500 includes a user switching system 600 which has a transmission portion 602 and a reception portion 604. It also includes a channel switching system 640 and a channel twisted pair line interface 658 which has an up channel portion 654 and a down channel portion 656. Signals which arrive at the matrix 500 along any of the sixteen user transmission paths enter the transmission portion 602 of the user switching system 600. The transmission portion 602 includes switches which selectively route these incoming signals along eight transmission paths 606 to the channel switching system 640, which includes switches that can route the signals to an up channel twisted pair line interface 654 along a transmission path 612 and/or to a down channel twisted pair line interface 656 along a transmission path 614. The eight transmission paths 612 lead to the eight up channel paths 860, respectively, and the eight transmission paths 614 lead to the eight down channel paths 870, respectively. No switching or routing occurs in the channel twisted pair line interface 658. The interface 658 is simply used to convert outgoing signals from common mode to differential mode and to convert incoming signals from differential mode to common mode, because signals travel along the channel paths 860, 870 in differential mode, but they travel through the matrix switching system 500 in common mode.

Signals received at the matrix 500 from an up channel path 860 are converted to common mode in the "up"

channel portion 654 of the twisted pair line interface 658 and arrive at the channel switching system 640 along a respective up channel reception path 616. Signals received at the matrix 500 from a down channel path 870 are converted to common mode in the "down" channel portion 656 of the twisted pair line interface 658 and arrive at the channel switching system 640 along a respective down channel reception path 618. The channel switching system 640 equalizes the incoming signal and routes it to a user reception channel 608 or to an up channel transmission path 612 or to a down channel transmission path 614, depending on the command received by the CPU 700. Signals traveling on a user reception channel 608 enter the reception portion 604 of the user switching system 600 where they are routed to one or more user reception paths 520. The details of the modules in Figure 15 are shown in subsequent figures. Signal equalization will also be described in more detail later.

Figure 16 shows the user switching system 600 of Figure 15 in greater detail. The transmission portion 602 is shown in the top half of the user switching system 600 and the reception portion 604 is shown in the bottom half. The transmission portion 602 includes a digitally-controlled 8x16 crosspoint switch 610. Signals arriving along the user transmission paths 510 travel to the crosspoint switch 610. From the crosspoint switch 610, there are eight paths 606 to the channel switching system 640. The crosspoint switch 610 can connect any incoming user path 510 with any one or more of the channel transmission paths 606.

The reception portion 604 of the user switching system 600 includes a digitally-controlled 8x16 crosspoint switch 620. The reception portion 604 receives signals from the channel switching system 640 along the eight reception channels 608 and switches them to one or more of the sixteen user reception paths 520.

Figure 17 details the channel switching system 640

of Figure 15. Signals being transmitted from users leave the user switching system 600, travel along the transmission channels 606, and enter the channel switching system 640. Signals can also enter the channel switching system 640 from the up channel portion 654 of the twisted pair line interface 658 along paths 616 and from the down channel portion 656 of the twisted pair line interface 658 along paths 618. Signals arriving at the channel switching system 640 from up or down channels along the paths 616, 618 go to a channel auto equalization system 642. Signals arriving at the channel switching system 640 can be routed to up or down channels or to users through the up and down channel switches 644, 646, respectively. The up channel two-way switches 644 are used to route signals from the transmission portion 602 of the user switching system 600 to the up channel transmission paths 612 and to route signals from the channel auto-equalization system 642 to the up channel transmission paths 612. The down channel two-way switches 646 are used to route signals from the transmission portion 602 of the user switching system 600 to the down channel transmission paths 614 and to route signals from the channel auto-equalization system 642 to the down channel transmission paths 614. The up channel transmission paths 612 take the signals through the up channel twisted pair line interface 654 to the up channel paths 860. The down channel transmission paths 614 take the signals through the down channel twisted pair line interface 656 to the down channel paths 870.

Signals arriving at the channel switching system 640 along up channel reception paths 616 and down channel reception paths 618 go to the digitally-controlled 8x16 crosspoint switch 630 which sends them along one of eight paths 619 to the channel auto-equalization system 642.

The channel auto-equalization system 642 counteracts the signal degradations that occur during transmission along twisted pair wiring. The details of auto-

equalization in the channel switching system 640 are identical to the auto-equalization in the reception portion 540 of the twisted pair termination modules 550 which are shown in Figure 14. The auto-equalization in the twisted pair termination modules 550 will be described in the description of Figure 20.

Signals leaving the channel auto-equalization system 642, can go to the reception portion 604 of the user switching system 600 along paths 608. The signals can also continue to travel between the hubs by traveling through selected up and down channel switches 644, 646 to the paths 612 to the up channels or to the paths 614 to the down channels. The up channel and down channel two-way switches 644, 646 and the crosspoint switch 630 are digitally-controlled by the central processing unit (CPU) 700.

Figure 18 shows the channel twisted pair line interface 658 of Figure 15 in greater detail. The channel twisted pair line interface 658 includes a crosspoint switch 635. It receives input from incoming paths 612, 614, from up channels 860, and from down channels 870. It sends signals out along outgoing paths 616, 618, up channels 860, and down channels 870. The digitally-controlled 8x16 crosspoint switch 635 is included in the channel twisted pair line interface 658 for impedance matching only. The crosspoint switch 635 does not involve any switching or routing of signals. Signals arrive from the channel switching system 640 along paths 612 and 614 and travel to their respective bi-directional twisted pair line interface 650. The respective bi-directional twisted pair line interface 650 then converts the signal from common mode to differential mode before it leaves the channel twisted pair line interface 658 along an outgoing up channel path 860 or down channel path 870. Signals being received at the channel twisted pair line interface 658 from the eight up channels 860 and the eight down channels 870 enter their

respective bi-directional twisted pair line interface 650 where they are converted from differential mode to common mode and then travel to the channel switching system 640 along their respective reception paths 616 (for up channels) or 618 (for down channels).

Now that the components of the matrix switching system 500 have been described, we can return to Figure 14 to see how signals travel through the network.

A video signal originates at the video input 800 of a user interface, such as the user interface 530C1 and may be coming from a video codec, video disc player, video camera, cable television, or a video recorder, for example. This analog video signal is in common mode. It travels to a frequency coupler 810 where it is combined with audio and data signals before being transmitted to the hub 750. The frequency coupler is shown in more detail in Figure 19, to which we will refer later.

Audio signals originate at the audio inputs 900, 902 of a user interface, such as the user interface 530C1. These audio signals, left and right stereo, may be coming in from a video codec, video disc player, video camera with sound, an audio or video tape recorder, or other audio source in common mode. The left and right audio signals pass through frequency modulators 920, 922. The modulated audio signals also travel to the frequency coupler 810, where they are combined with video and data signals before going out over transmission lines 830 to the hub 750.

Digital data signals may be input to a user interface, such as user interface 530C1 at data input 910. User data coming in through data input 910 is first routed through the central processor (CPU) 701 for the user interface 530C1 and then, still in the form of a digital signal, to the first frequency shift key modulator 930. System control data is transmitted from the central processor 701 to the second frequency shift key modulator 940. These first and second frequency

shift key modulators 930, 940 put the digital data signals onto analog data signals. The modulated data signals proceed to the frequency coupler 810 of their user interface 530C1, where they are combined with the audio and video signals.

The combined audio, video and data signal from the frequency coupler 810 of the user interface 530C1 is then routed through the transmission portion 560 of its respective twisted pair termination device 550, which converts the signal from common mode to differential mode. Figure 19 shows the frequency coupler 810 and common to differential mode converter 560 in more detail. Returning to Figure 14, the combined signal leaves the transmission portion 560 of the twisted pair termination device 550, travels over the twisted pair 830, and is received at the reception portion 540 of another twisted pair termination device 550 at the hub 750. When the signal is received at the hub, it is converted back into common mode and equalized, which will be described in detail in reference to Figure 20. It then travels in common mode to a frequency separator 850. The frequency separator 850 separates from the combined audio, video and user data signals the system control data, sends the system control data to the frequency shift key demodulator 857, and sends the remaining combined audio, video and user data signal to the matrix switching system 500 along the path 510. The frequency shift key demodulator 857 converts the system control data from an analog signal to a digital signal and sends it to the central processor 700. The system control data coming in from the various users will tell the central processor 700 how to connect the digitally-controlled switches in the matrix switching system 500. The CPU 700 can send system control data to the other hubs 750 along the digital link 570 to provide other hubs with system control data.

The remaining combined audio, video and user data

signal arrives at the matrix 500 along a user transmission path 510, as was described with respect to Figure 15. The signal is switched through the matrix 500, with the central processor 700 of the hub 750 opening and closing switch points in the crosspoint switches 610, 620, 630 and two-way switches 644, 646 as needed to route the signal in the correct direction. (These switches are found in Figures 16 and 17.) If the signal is going to an upstream channel path 860, the signal passes through a bi-directional twisted pair line interface, as discussed in reference to Figure 18, and the signal leaves the hub 750 via one of the upstream channels 860. Similarly, if the signal is going to a downstream channel path 870, the signal passes through a bi-directional twisted pair line interface, as described in Figure 18, and the signal leaves the hub 750 via one of the downstream channels 870. If the signal is to go to another user connected to the hub 750, such as user 530C2, shown on the right of the hub 750, then the signal leaves the matrix 500 through the appropriate user reception path 520 and enters another frequency coupler 810 where the combined audio, video and user data signal is combined with a system control data signal coming from the CPU 700. The combined signal passes through the transmission portion 560 of the twisted pair termination module 550 shown on the right side of the hub 750 of Figure 14, where it is converted back to differential mode and sent out over a twisted pair 880. The signal is received at the user interface 530C2, goes through the reception portion 540 of another twisted pair termination module 550, where it is converted back to common mode and equalized. The combined signal is then routed through the frequency separator 850 of the user interface 530C2 which separates the signals into audio, video and data signals. The video signal leaves the user interface through the video output 958 to a video codec, video recorder, video monitor, or other device for receiving

video signals. The left and right audio signals are directed through first and second frequency demodulators 950, 952, respectively, and then leave the user interface 530C2 through audio outputs 960, 962 to a video codec, an audio or video tape recorder, or other audio receiver. The data signals are directed to the first and second frequency shift key demodulators 855, 857, where they are converted from analog signals to digital signals. The data signals then travel to the CPU 701 of the user interface 530C2 and can leave through data output 964.

Figure 19 shows the way signals received at the user interface 530C1 or 530C2 of Figure 14 are combined and converted to differential mode before being transmitted to the hub 750. Figure 20 shows the way signals are received at the hub, equalized, and converted to common mode.

In general, Figure 19 shows that the individual signals, except for the video signal, are modulated. The two carrier frequencies which are used to modulate the user data signal and the system control data signal are designated as reference frequencies and are later used for equalization of received signals, as will be described below.

Figure 19 shows the circuit that is used for signals which come in to the user interface 530 in common mode and go out in differential mode over twisted pair wiring. A video signal enters in common mode and is buffered at the video input 800. The audio signals entering and being buffered at the audio inputs 900, 902 are translated to new spectral locations by frequency modulation at modulators 920, 922. The user data and system control signals leaving the central processor 700 are translated to new spectral locations by frequency-shift keying modulation at modulators 930, 940. The FM1, FM2, FSK1, and FSK2 modulated signals and the video signal all go to a frequency coupler 810 where the signals are combined. The combined signal then travels

through the transmission portion 560 of the twisted pair termination module 550 which converts the common mode signal to differential mode. The combined audio, video, and data signal is then transmitted to the hub 750 along path 830.

Figure 19 also describes the circuit used for transmission from the hub 750 to the user interface 530. The only difference is that the audio, video, and user data signals are already modulated so the frequency coupler 810 only combines the system control data with the audio, video, and user data signal.

Figure 20 shows that a signal received at a user interface or at a hub will be converted back to common mode and automatically checked for signal degradation associated with twisted pair transmission. The reference frequency is filtered out and checked for signal degradation. The signal is then automatically equalized based on the amount the reference frequency has been degraded.

Figure 20 shows the circuit that is used for a signal coming into the reception portion 540 of a twisted pair termination module 550 of Figure 14 as a differential signal. The combined audio, video, and data signal arrives over twisted pair wiring, arriving on paths 702, 704 at the reception portion 540 of the twisted pair termination module 550. The converter 706 converts the differential mode signal into a common mode signal. The common mode signal then travels to the analog switch 708 which will allow either the existing signal or the equalized signal to pass through. From this analog switch 708, the reference frequency associated with the second Frequency Shift Key Modulator (FSK2) is discriminated through the filter 710 in order to test for signal degradation. The FSK2 signal which has been modulated to the reference frequency is in the form of a sine wave. This sine wave signal is then converted into a DC signal at the frequency shift key

demodulator 857. This analog DC signal is then converted into a digital signal at the converter 714. This digital signal is characteristic of the incoming signal degradation that occurred through the transmission line. The amount of signal degradation is then computed by the central processing unit 700 of the hub. (If the equalization were occurring in a user interface, the CPU 701 of the user interface would control the equalization.) Depending on the computation of the amount of degradation, switches 718, 720, 722, 724, 726, 728, 730, and/or 732 can be engaged by the digital control 716 to interact on the equalization amplifier 734 by connecting different equalization circuits. If equalization is required, the analog switch 708 is connected to the amplifier 734 to allow the equalized combined audio, video, and data signal to continue to the frequency separator 850 and the matrix switching system along path 510.

The reference frequency associated with FSK2 is used for auto-equalization only on the initial path from the user interface 530 to the hub 750. The reference frequency associated with FSK1 is used for auto-equalization on the hub-to-user interface path and any subsequent paths taken by the signal. The reason FSK2 is used for the initial path signal degradation is because the FSK2 signal is already being demodulated to obtain the system control data. This arrangement is more efficient because the auto-equalization also uses the demodulation of a reference frequency signal and there would be no reason to demodulate another signal.

While this embodiment has been discussed as having eight channels, it is actually intended to be expanded to 64 channels as was previously discussed with respect to Figure 8. Unlike the previous embodiment of Figure 4, this embodiment requires only two pairs of wires to send audio, video, and data simultaneously and bi-directionally between the user and the hub. However,

since standard wiring is used, there are actually four pairs of wires between the user and hub, which is not shown in Figure 14. Therefore, this embodiment frees up two pairs of wire between the user and the hub to perform other functions. The additional two pairs can be used to transmit another set of audio, video, and data signals, or it can be used for high speed transmission of digital data, such as for Ethernet or other high speed digital data networks.

Figure 21 illustrates an embodiment wherein a high speed digital data communication path at each user interface 532C1, 532C2 is made possible using the spare twisted pairs of the cable between the user interfaces and the hub 750. A high speed digital data signal enters the user interface 532C1 through a digital network user interface 965, such as an Ethernet interface. The signal travels through a digital matching interface 970 where the signal is attenuated, preferably down to 300 mV on this embodiment, for the reduction of interference. The attenuated signal then passes through the transmission portion 560 of its respective twisted pair termination module 550 where the signal is converted from common mode to differential mode and a reference frequency is added. A reference frequency must be added for auto-equalization in this case, because no frequency carriers are added on the digital signal. The signal then travels through twisted pair wiring 972 to the hub 750, where it passes through the reception portion 540 of another twisted pair termination module 550. This module converts the signal back to common mode and equalizes the signal. The signal then travels through another digital matching interface 971, where it is amplified back to its original level. The signal then travels through a digital network hub 976, such as an Ethernet or Token Ring hub, where it can be routed to another hub 750 or can travel to another user on the present hub 750 along twisted pair wiring 974. Thus, the present invention permits the use of

audio, video, and data transmission along with high speed digital data over the same four pairs of wire, with the high speed digital data remaining in digital form throughout its path.

5 Figure 22 illustrates another embodiment of the present invention, wherein the high speed digital data paths share the same switching matrix 500 as the combined audio, video and data signals.

10 This embodiment is similar to the embodiment described in Figure 21 except the digital signal does not pass through a digital matching interface 971 in the hub 750, remaining at low voltage through the hub, and it travels through the same matrix switching system as the combined audio, video, and data signals. A digital
15 signal travels through the matrix switching system 500 in the same manner as a combined audio, video, and data signal, which is described in Figures 15, 16, 17, and 18. The digital signal goes directly to the matrix 500, without requiring frequency splitting because the system
20 control data has been added to the audio, video and data signal. In this embodiment, eight user paths will be dedicated to high speed data signals and the remaining eight user paths will be used for the combined audio, video, and data signals. A user path could also be
25 dedicated to a local digital network server or a digital public network interface, if desired.

30 In this embodiment, the user can transmit audio, video, data and high speed digital data signals to another user without making separate connections for each of the signals. Consequently, this combined system will provide greater flexibility and efficiency.

35 Figure 23 illustrates another embodiment, wherein two users can communicate directly without passing through the hub. In this embodiment, two user interfaces 531C1, 531C2 are connected together with two sets of bi-directional audio, video, and data paths between them. These user interfaces 531C1, 531C2 are identical to user

interfaces 530C1, 530C2 except an additional bi-directional audio, video, and data path is included on the user interface. This could be used, for example, if two users were having a video conference while exchanging full motion video information at the same time.

Figure 24 illustrates another embodiment wherein there is a bi-directional audio, video, and data path between two users 532C1, 532C2, and a high speed digital data communication path between the two users is made possible using the spare twisted pairs of the cable between the user interfaces. This is identical to Figure 22 but with the hub removed. This could be used for conducting video conferences on the audio, video, and data path while also viewing imaging such as x-rays, cat-scans, etc., on the high speed digital data path.

Figure 25 illustrates another embodiment, which is the same as Figure 24, except a digital network communication controller 980 is added to each user interface 533C1, 533C2 so that the high speed digital data communication path does not require an external interface as in Figure 24.

While preferred modes of signal transmission have been shown throughout the foregoing description, it will be clear that other transmission modes could be used.

It will be clear to those skilled in the art that modifications may be made to the preferred embodiment described above without departing from the scope of the present invention.

What is claimed is:

1. A matrix switch made up of a plurality of crosspoint switches, characterized in that:

5 the matrix defines upstream connections, downstream connections, and user connections and provides bi-directional switching capability between the upstream and downstream connections, between every user and every upstream connection, between every user and every downstream connection, and between every user and every other user connected to the matrix while requiring fewer than half of the number of switching points that would be required by a single, standard NxN crosspoint switch interconnecting all the inputs and outputs.

15 2. A matrix switch made in accordance with Claim 1, and further including a circuit for equalizing signals upon receipt and before introducing the signals to the matrix switch.

20 3. A network, including a user interface for every user and at least one matrix switch as recited in Claim 2, wherein each user interface also includes a circuit for equalizing signals upon receipt of the signals at the user interface from the matrix.

25 4. A network, as recited in Claim 3, and further comprising circuitry to convert signals from common mode to differential mode before sending them out of the matrix over twisted pair wiring.

30 5. A device for the simultaneous, bi-directional transmission of video bandwidth signals in the local area network environment, comprising:

- a plurality of user ports;
- a plurality of channel up ports;
- a plurality of channel down ports;

a switching matrix, comprising:

a plurality of interconnected NC x NU cross-point switches, where NC is the number of channel up ports and NU is the number of user ports; and

5 a plurality of buffers which define the direction of transmission between the cross-point switches;

10 wherein said switching matrix permits the simultaneous, bi-directional transmission of video bandwidth signals between users, between users and up channels, and between users and down channels.

6. A method for the simultaneous transmission of analog video and digital data signals on twisted pair cable, comprising the steps of:

15 transmitting the analog video signal on a first pair of wires;

carrying the digital data signal on a second pair of wires in the same twisted pair cable;

20 transmitting a second analog video signal on a third pair of wires in the opposite direction from the direction in which the signal is sent on the first pair of wires; and

25 transmitting a second digital data signal on a fourth pair of wires in the opposite direction from the direction in which the data is sent on the second pair of wires; with all four pairs of wires being in the same twisted pair cable.

30 7. A method for the simultaneous transmission of analog video and digital data signals on twisted pair cable, comprising the steps of:

transmitting the analog video signal on a first pair of wires;

35 carrying the digital data signal on a second pair of wires in the same twisted pair cable;

attenuating the digital data signal to reduce

its voltage before sending it out over the twisted pair wires in differential mode, so as to reduce the interference between the digital data signal and the analog video signal.

5 8. A method for the simultaneous transmission of analog video and digital data signals on twisted pair cable as recited in Claim 7, and further comprising the step of equalizing the video and digital data signals upon reception of the signals over twisted pair wiring.

10 9. A method as recited in Claim 7, and further comprising the step of sending the analog video and digital data signals to the same switching matrix, so they can all be switched and sent to various users connected to the switching matrix.

15 10. A method for automatically equalizing a signal sent over twisted pair wiring, comprising:

 sending a known reference frequency signal on the twisted pair wiring along with the signal to be equalized;

20 receiving the signal at a reception point;
 splitting the reference frequency signal off from the signal to be equalized at the reception point;
 measuring the amount of attenuation of the reference frequency signal at the reception point;

25 providing a plurality of circuits which can boost the signal varying amounts; and
 automatically selectively engaging said circuits to equalize the signal depending upon the amount of attenuation measured in the reference frequency.

30 11. A method for automatically equalizing a signal as recited in Claim 10, wherein said signal to be equalized has a bandwidth sufficient to carry an analog video signal.

12. A method for automatically equalizing a signal sent over twisted pair wiring as recited in Claim 11, and further comprising, the step of conducting the method bi-directionally, such that the reception point is also a sending point, and the sending point is also a reception point, and the reference frequency is measured upon reception of signals at both points, and the respective circuits are automatically selectively engaged at both points, depending upon the amount of attenuation of the reference frequency that is measured upon reception at both points.

13. A method for the transmission and switching of analog video and digital data signals, comprising:

providing a crosspoint switch with input points and output points;

sending video signals to at least one of said input points;

simultaneously sending digital data signals to at least another of said input points;

switching said crosspoint switch so that both video and digital data signals are connected to respective output points at the same time;

such that analog video signals and digital data travel through the same crosspoint switch at the same time.

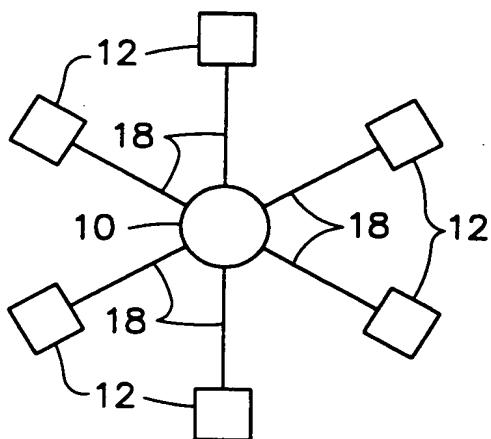


FIG. 1
(PRIOR ART)

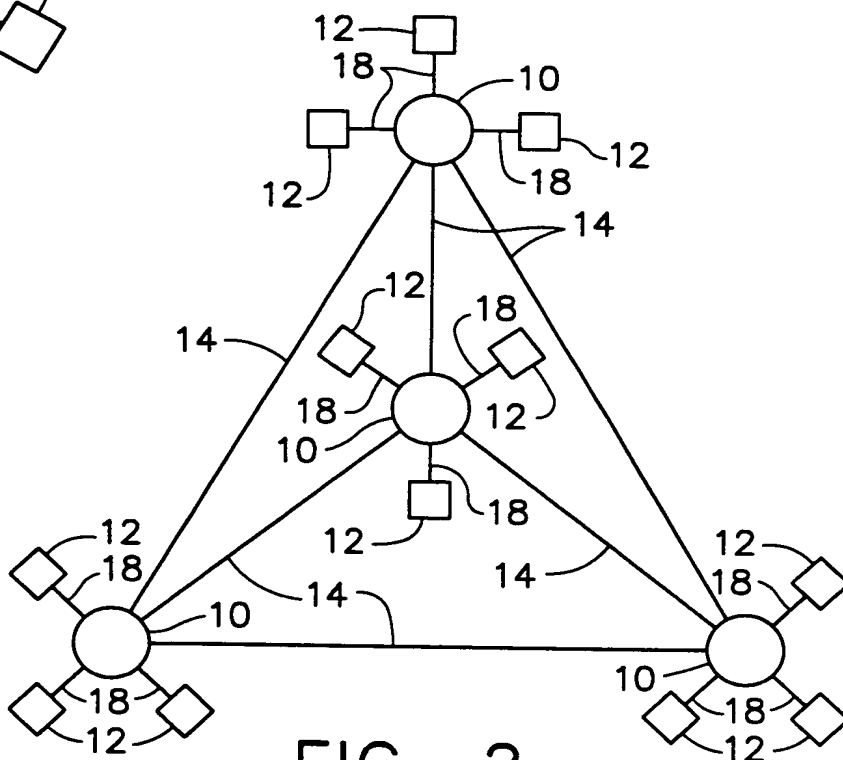


FIG. 2
(PRIOR ART)

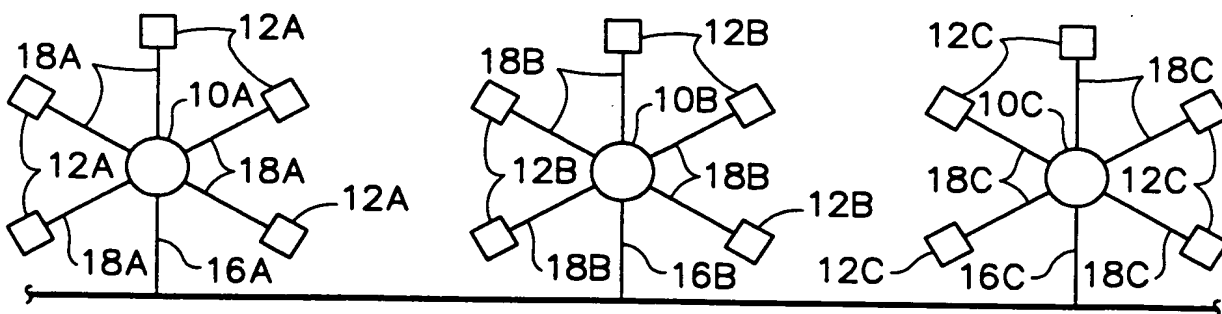


FIG. 3

(PRIOR ART)

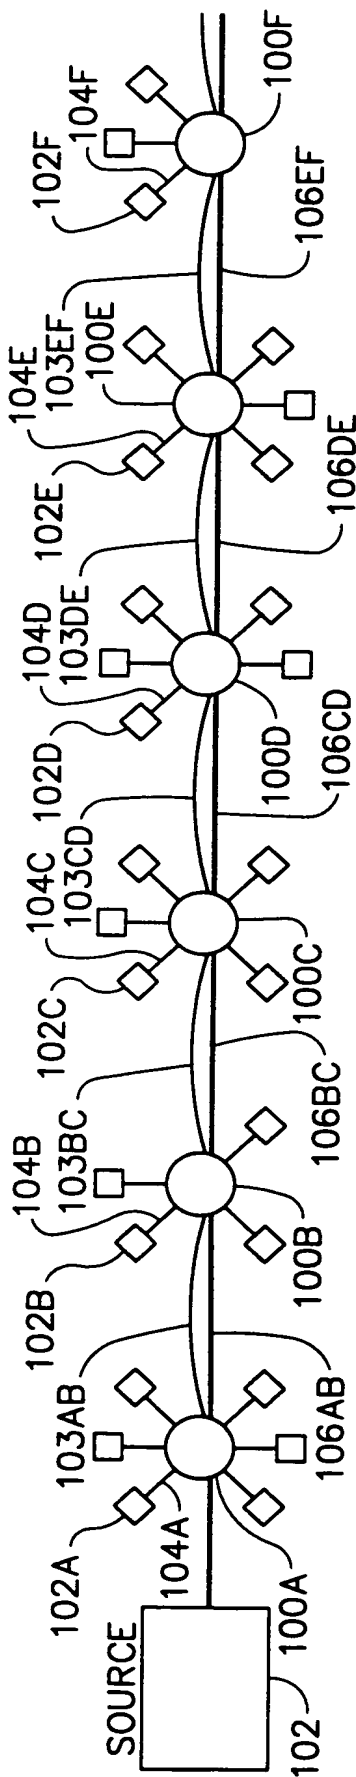


FIG. 4

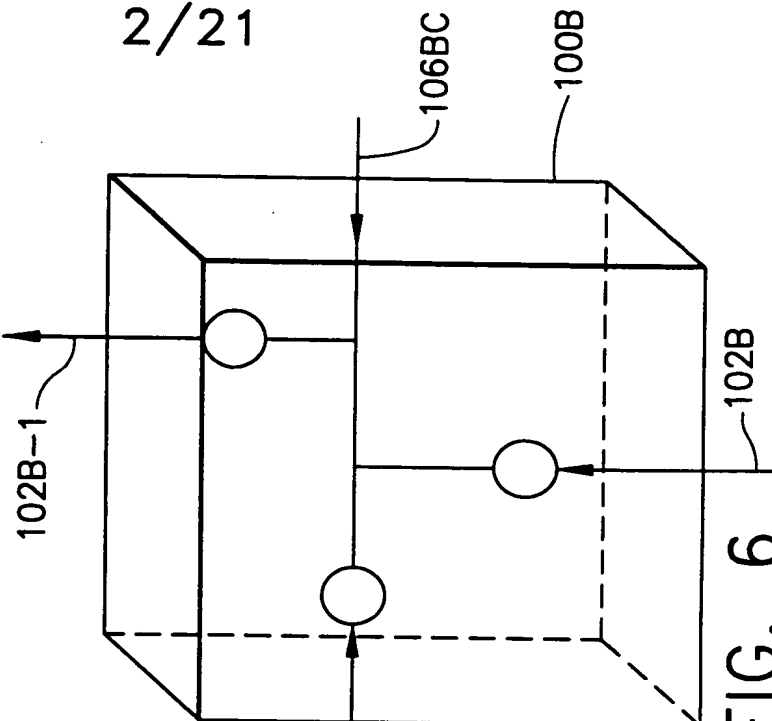


FIG. 5

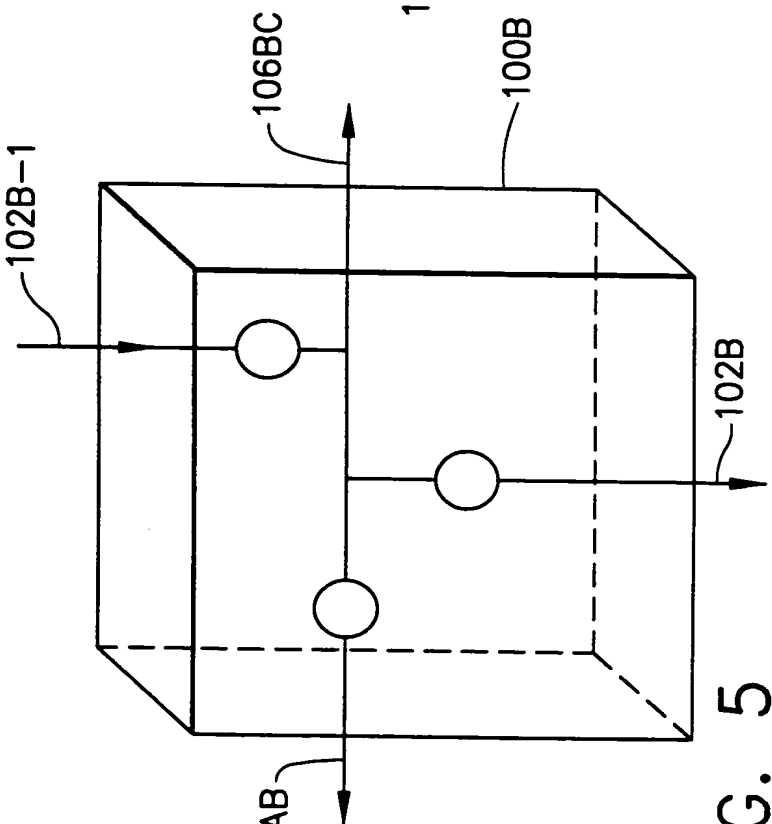


FIG. 6

3/21


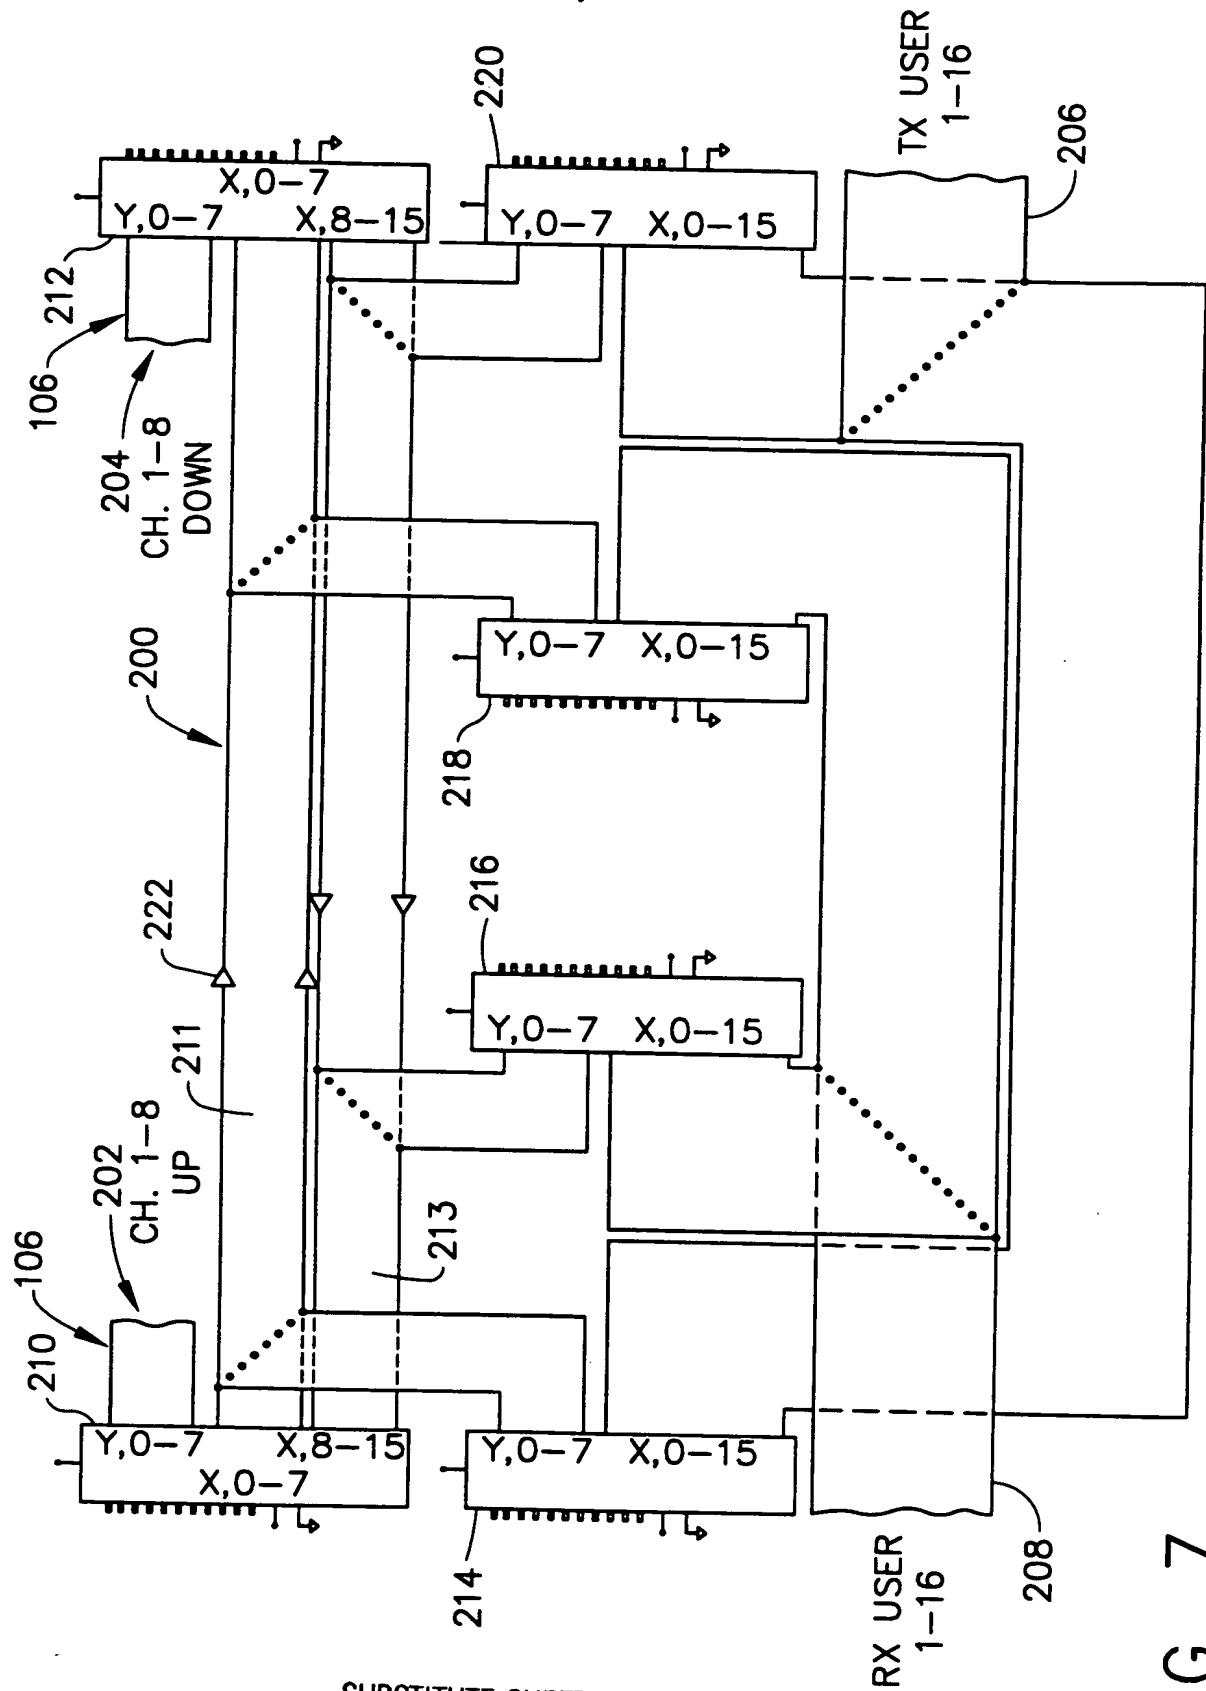


FIG. 7

4/21

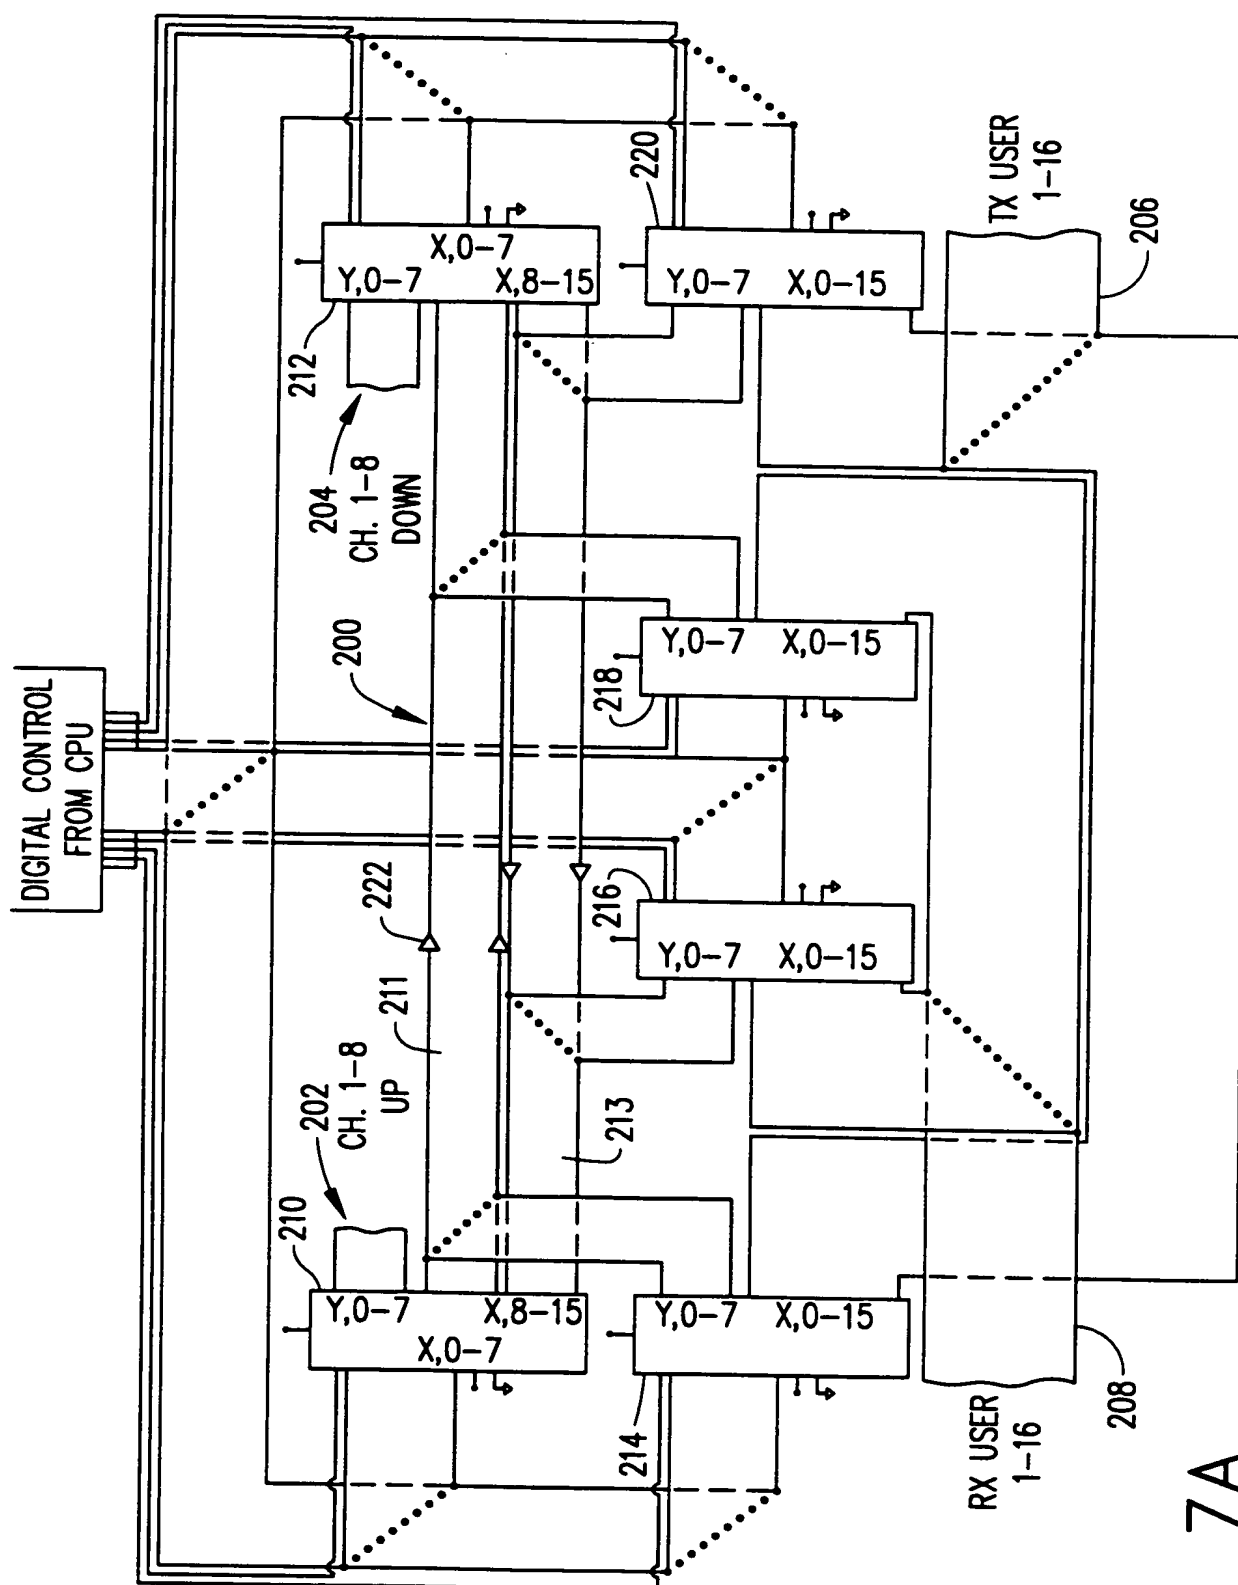

SUBSTITUTE SHEET (RULE 26)

FIG. 7A

5/21

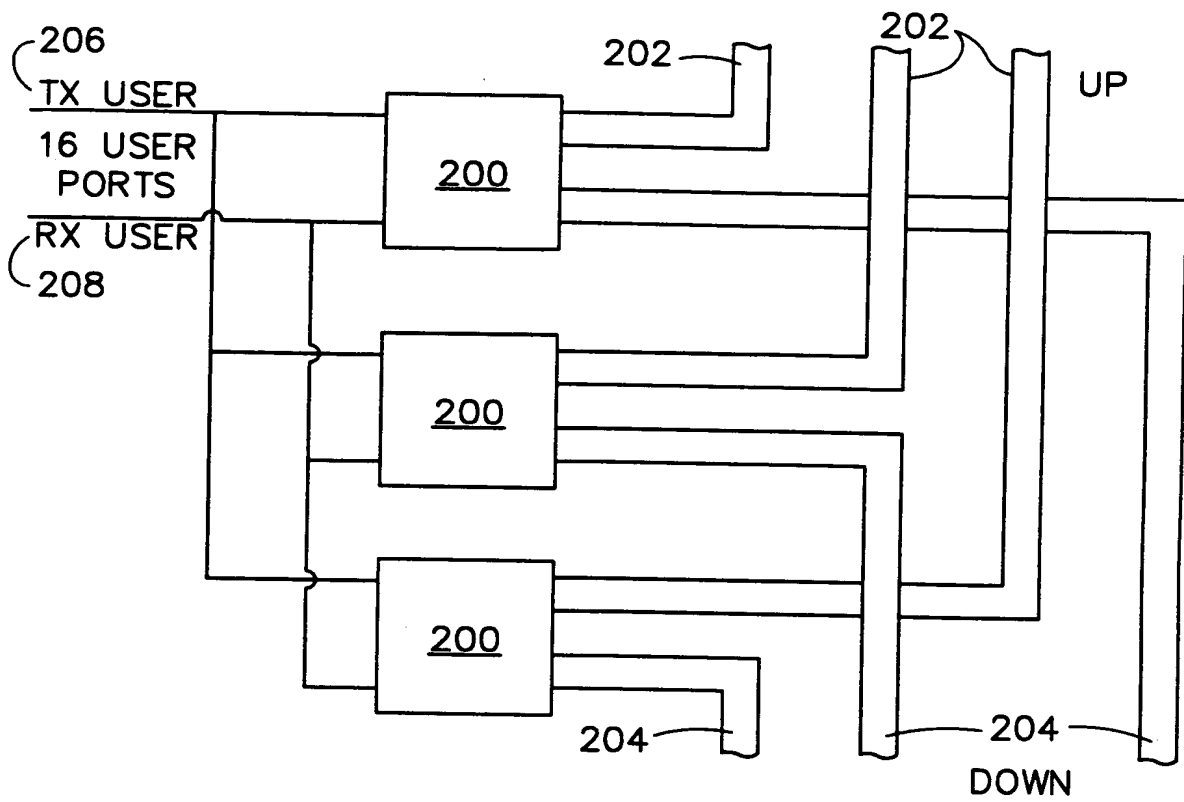


FIG. 8

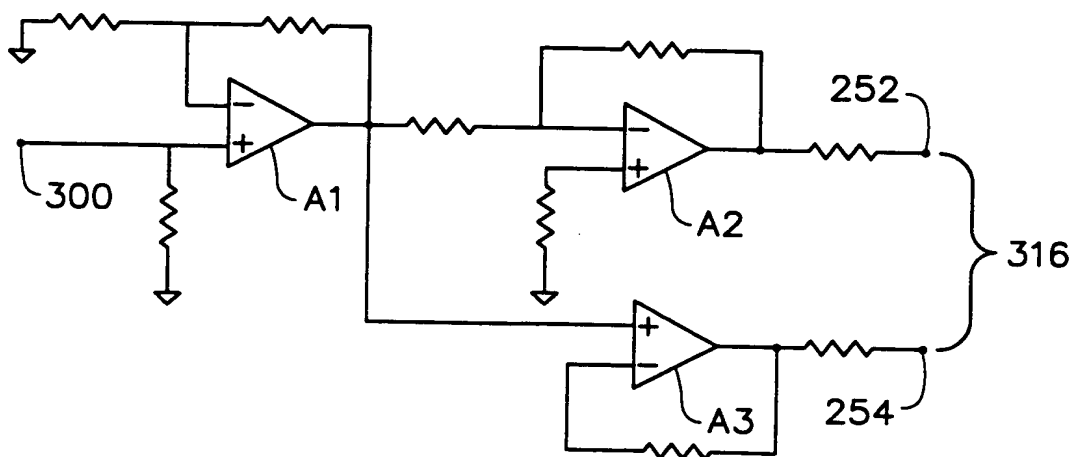


FIG. 9

SUBSTITUTE SHEET (RULE 26)

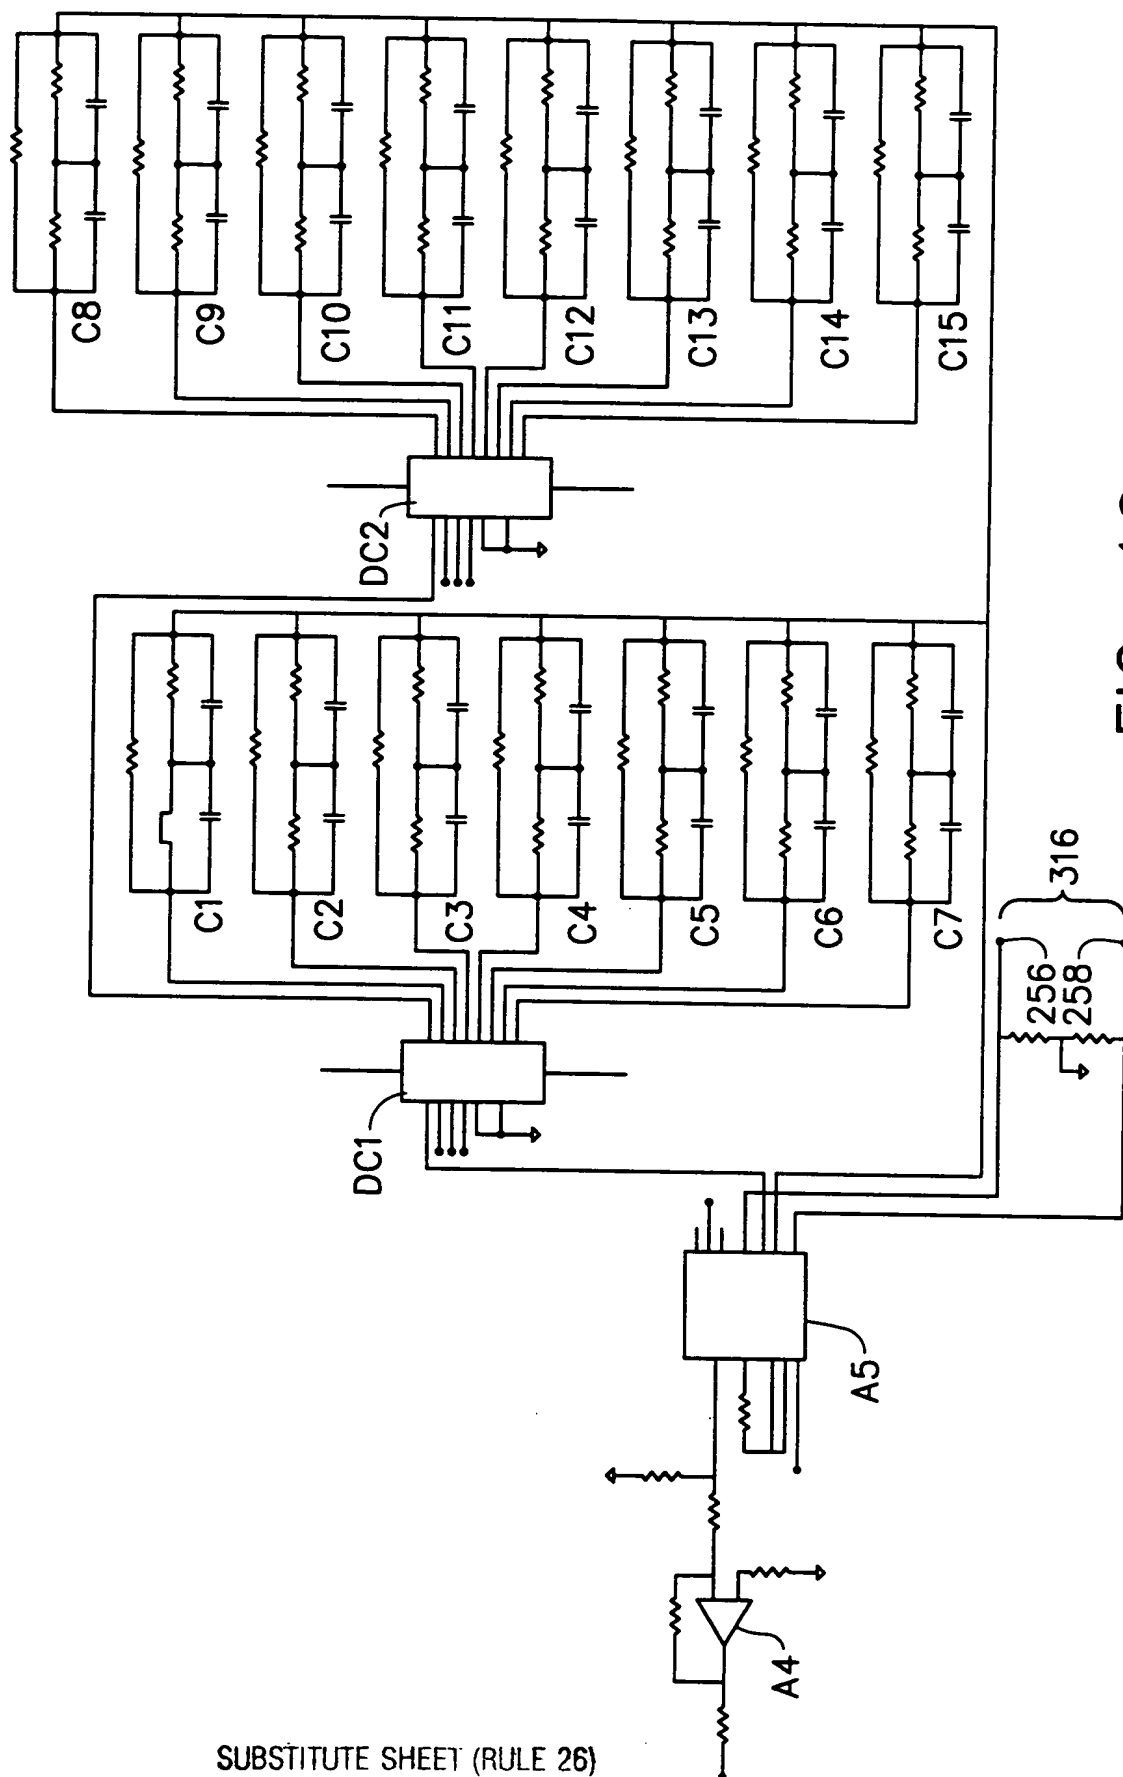


FIG. 10

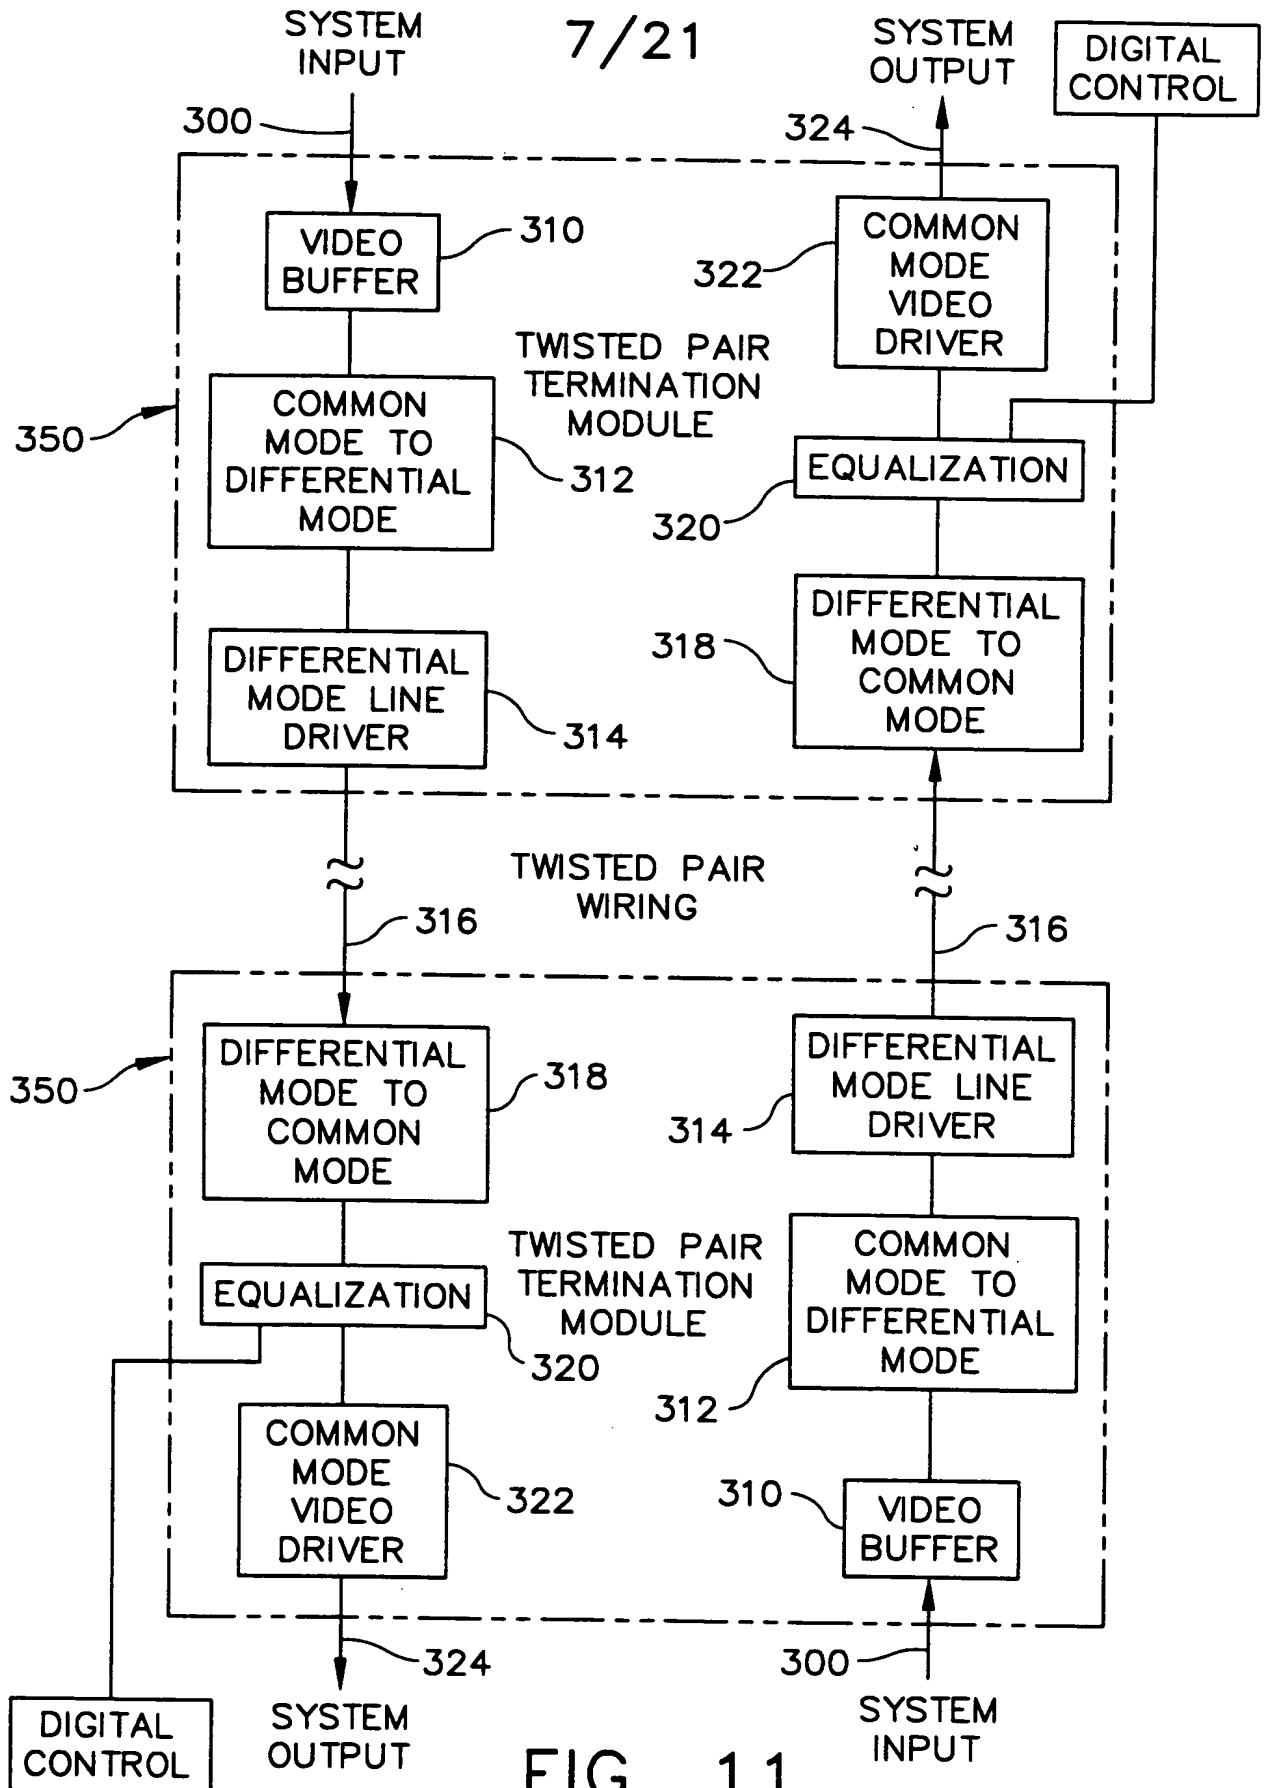


FIG. 11

SUBSTITUTE SHEET (RULE 25)

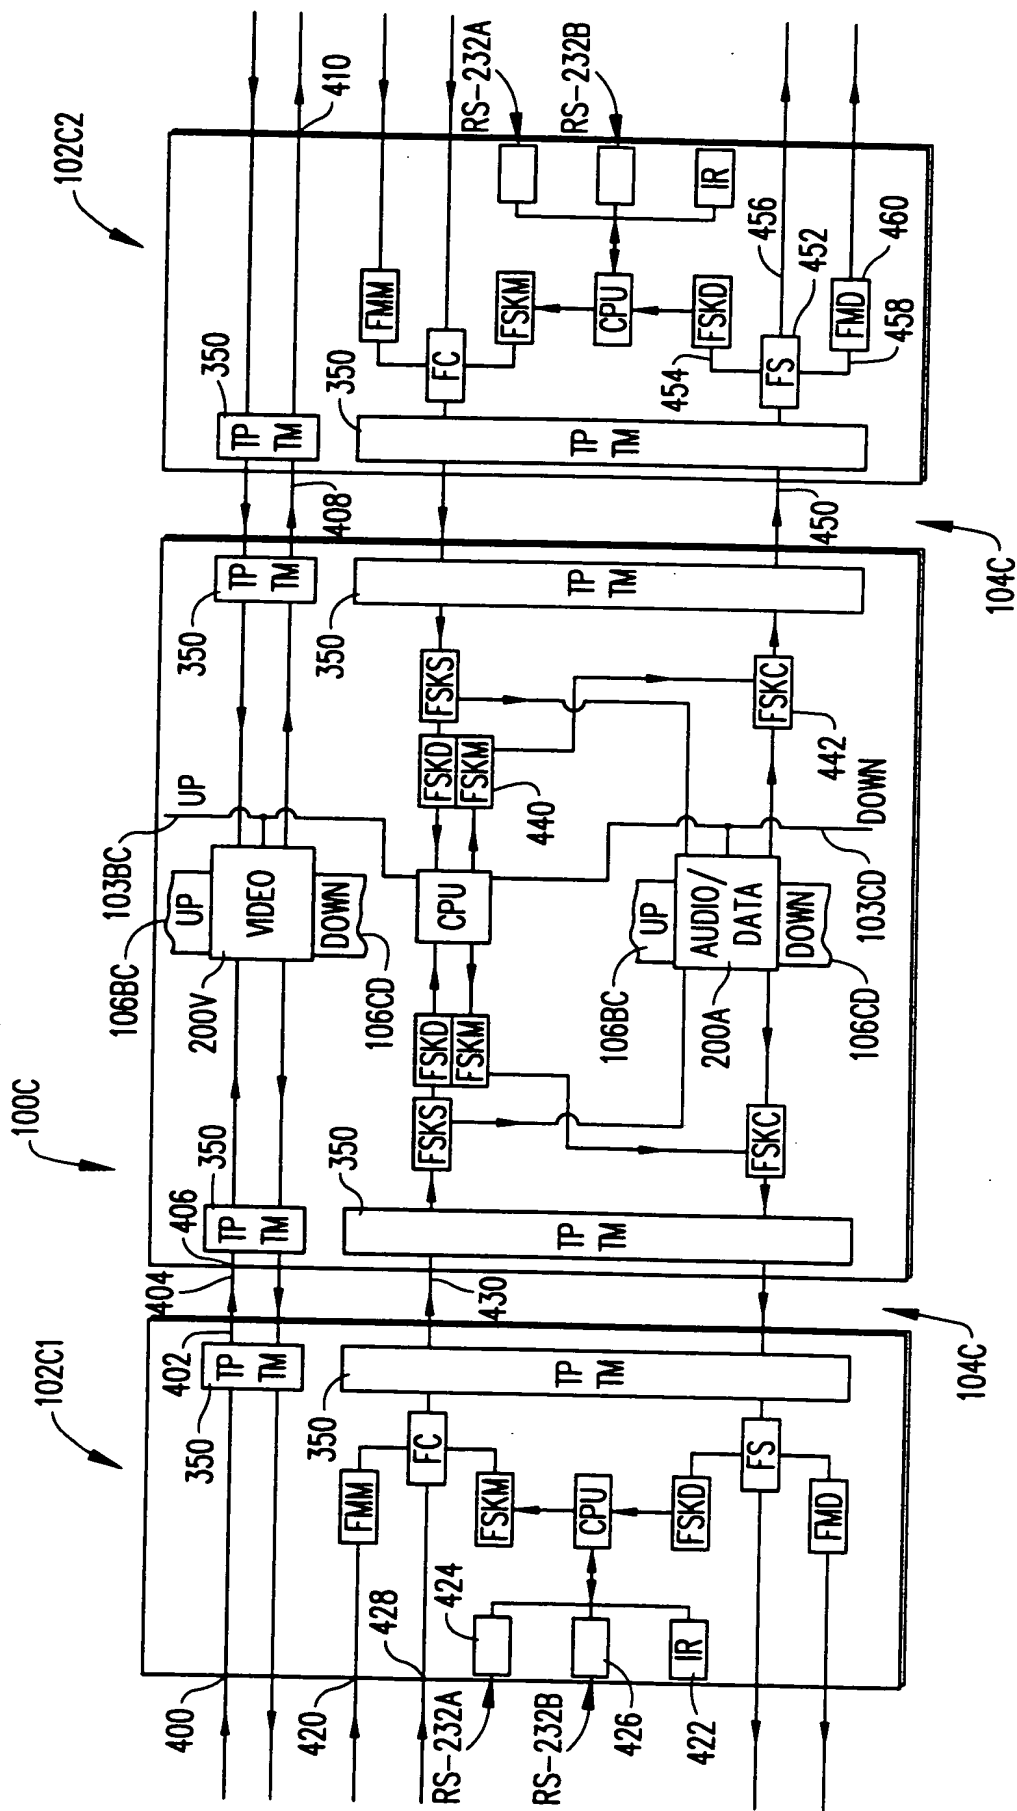


FIG. 12

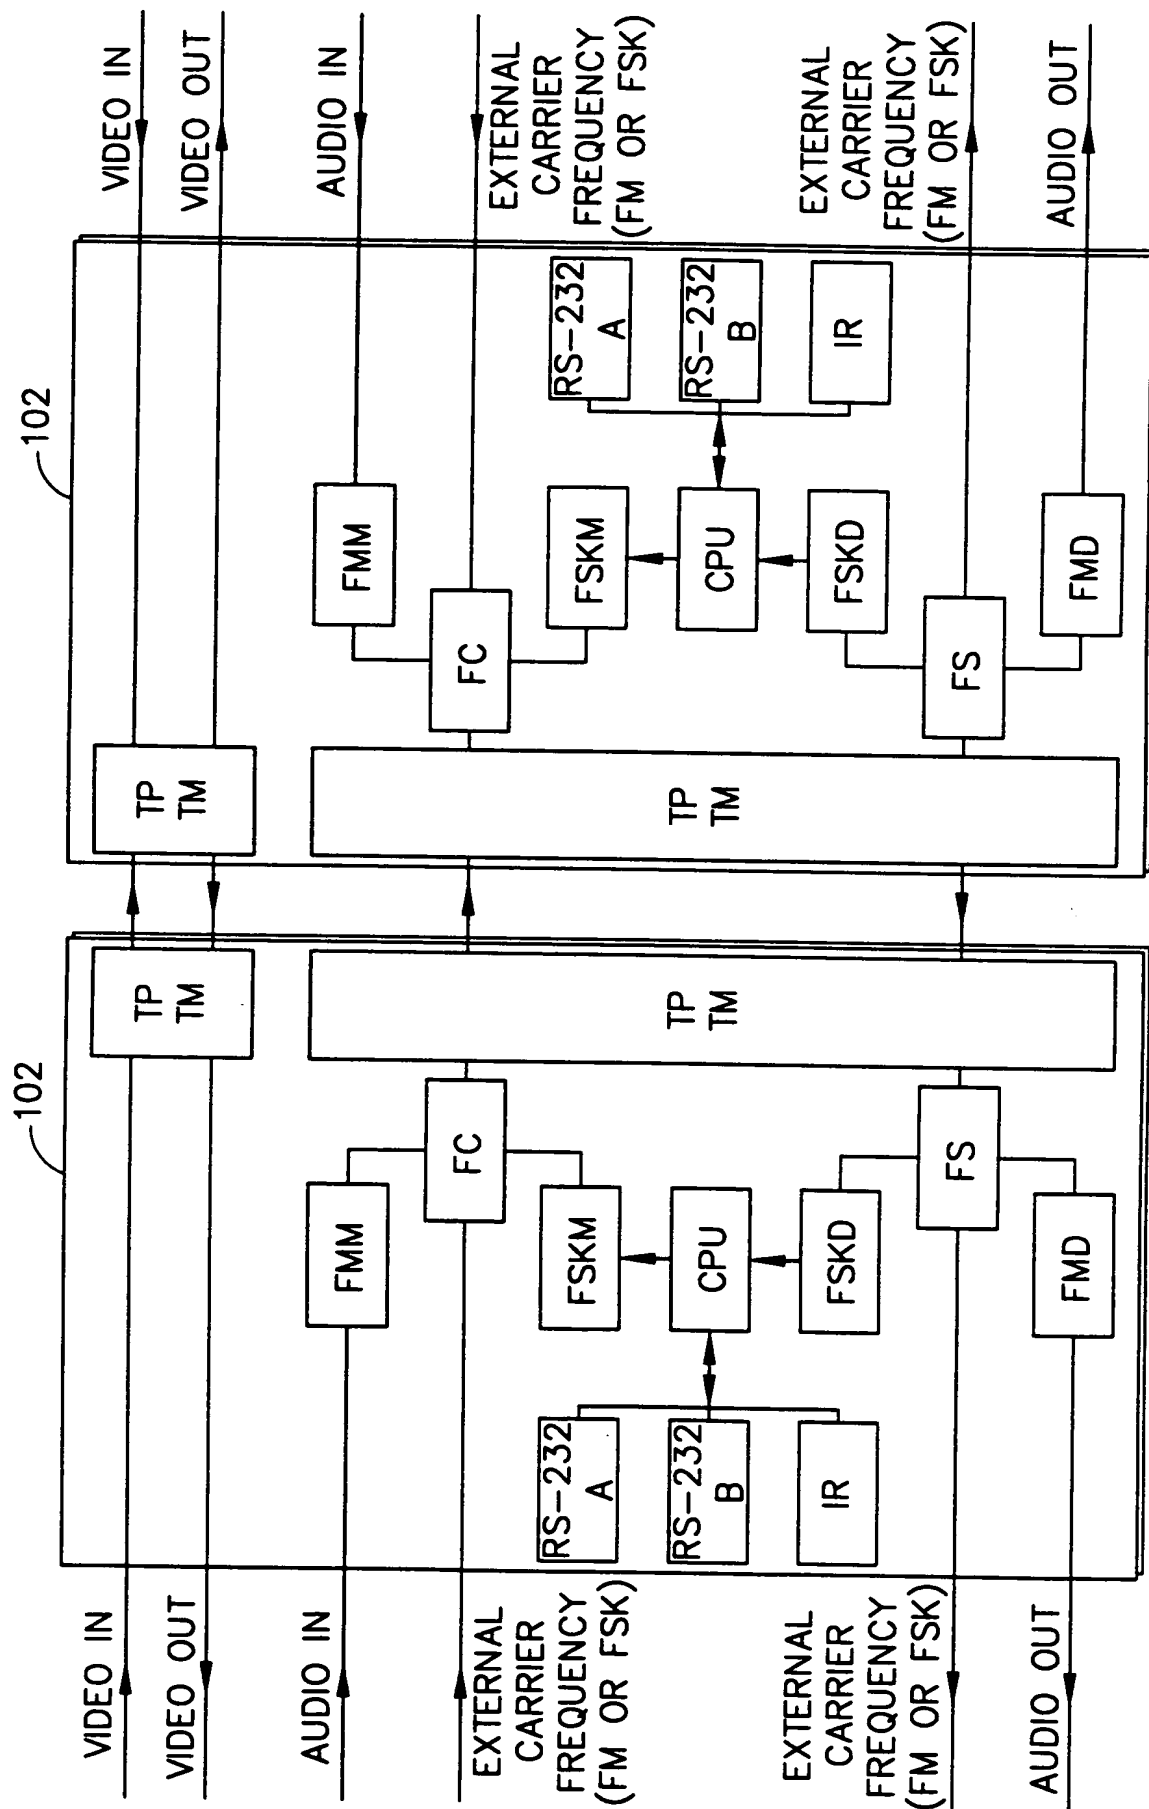


FIG. 13


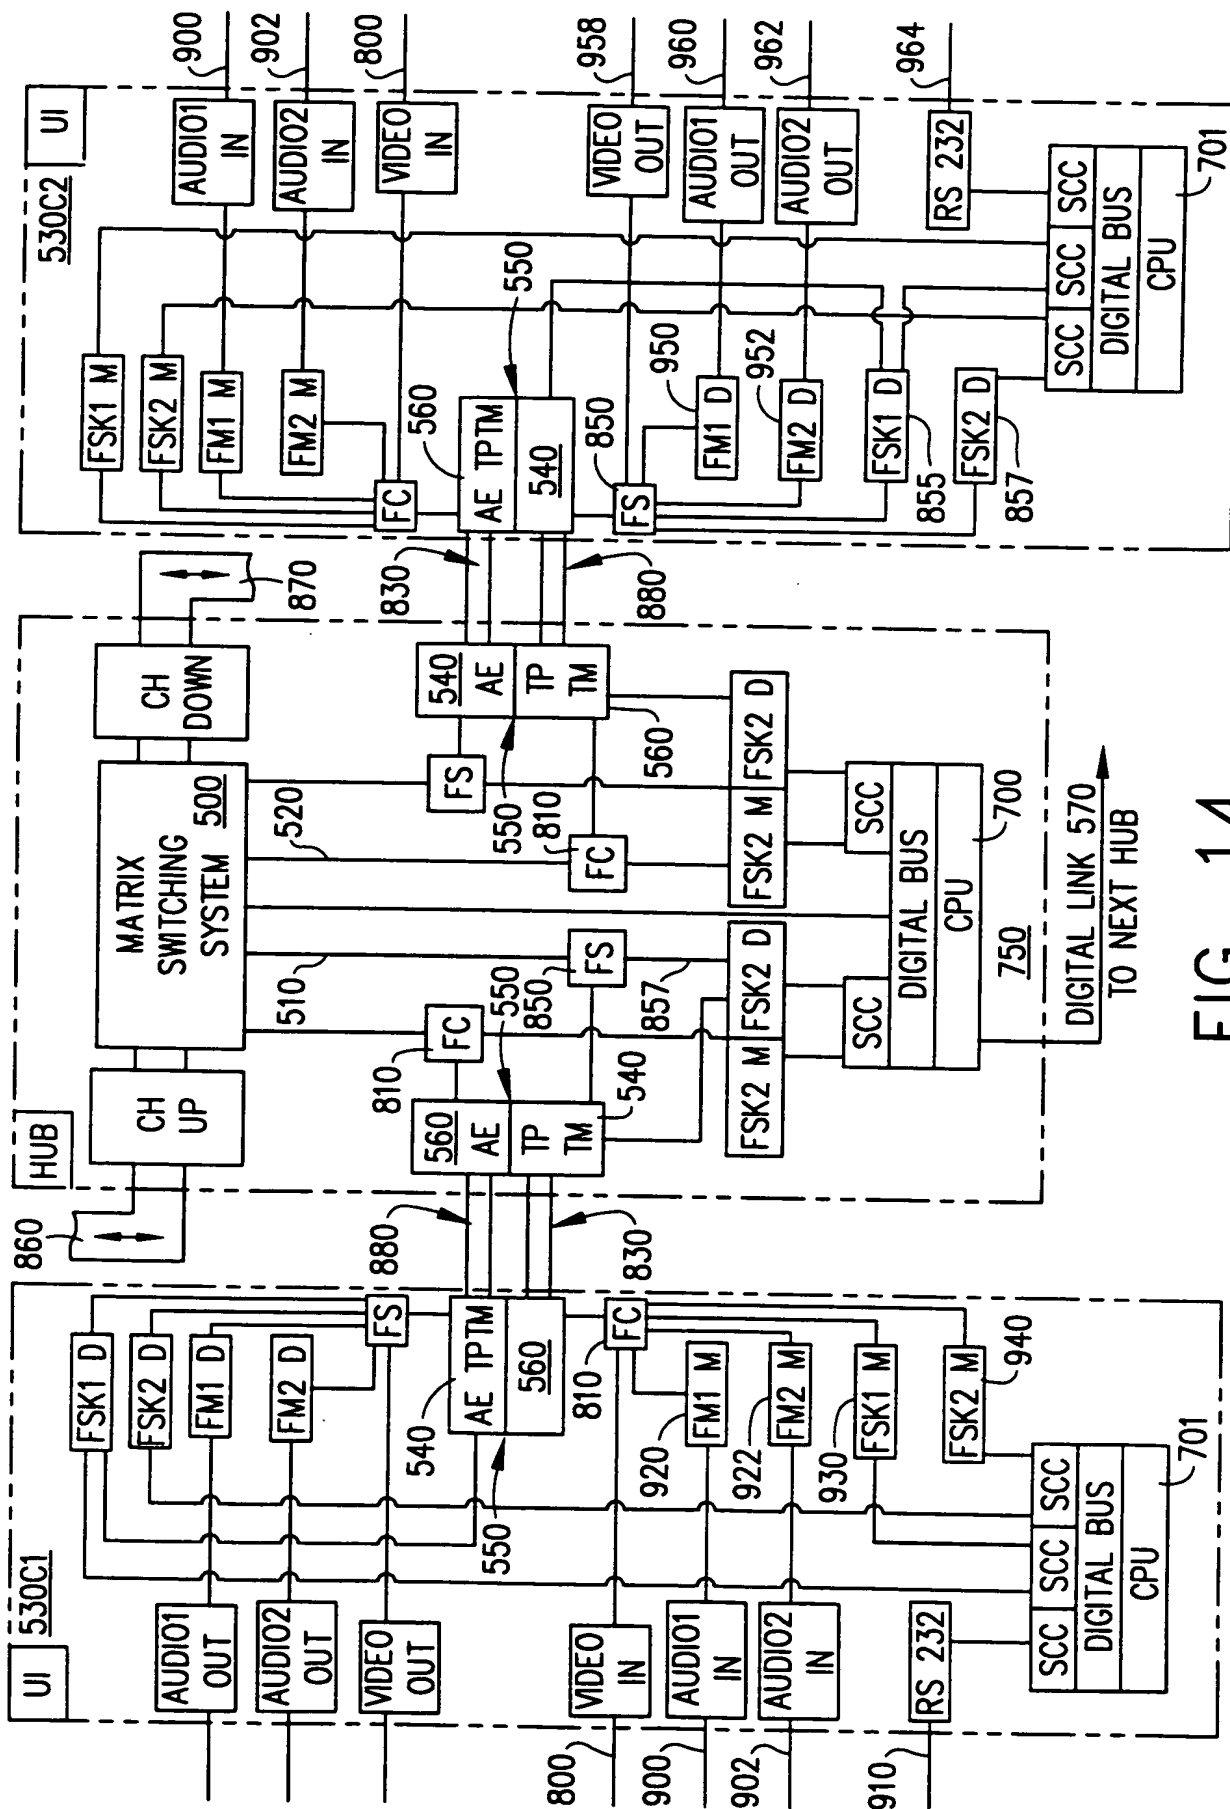


FIG. 14

11/21

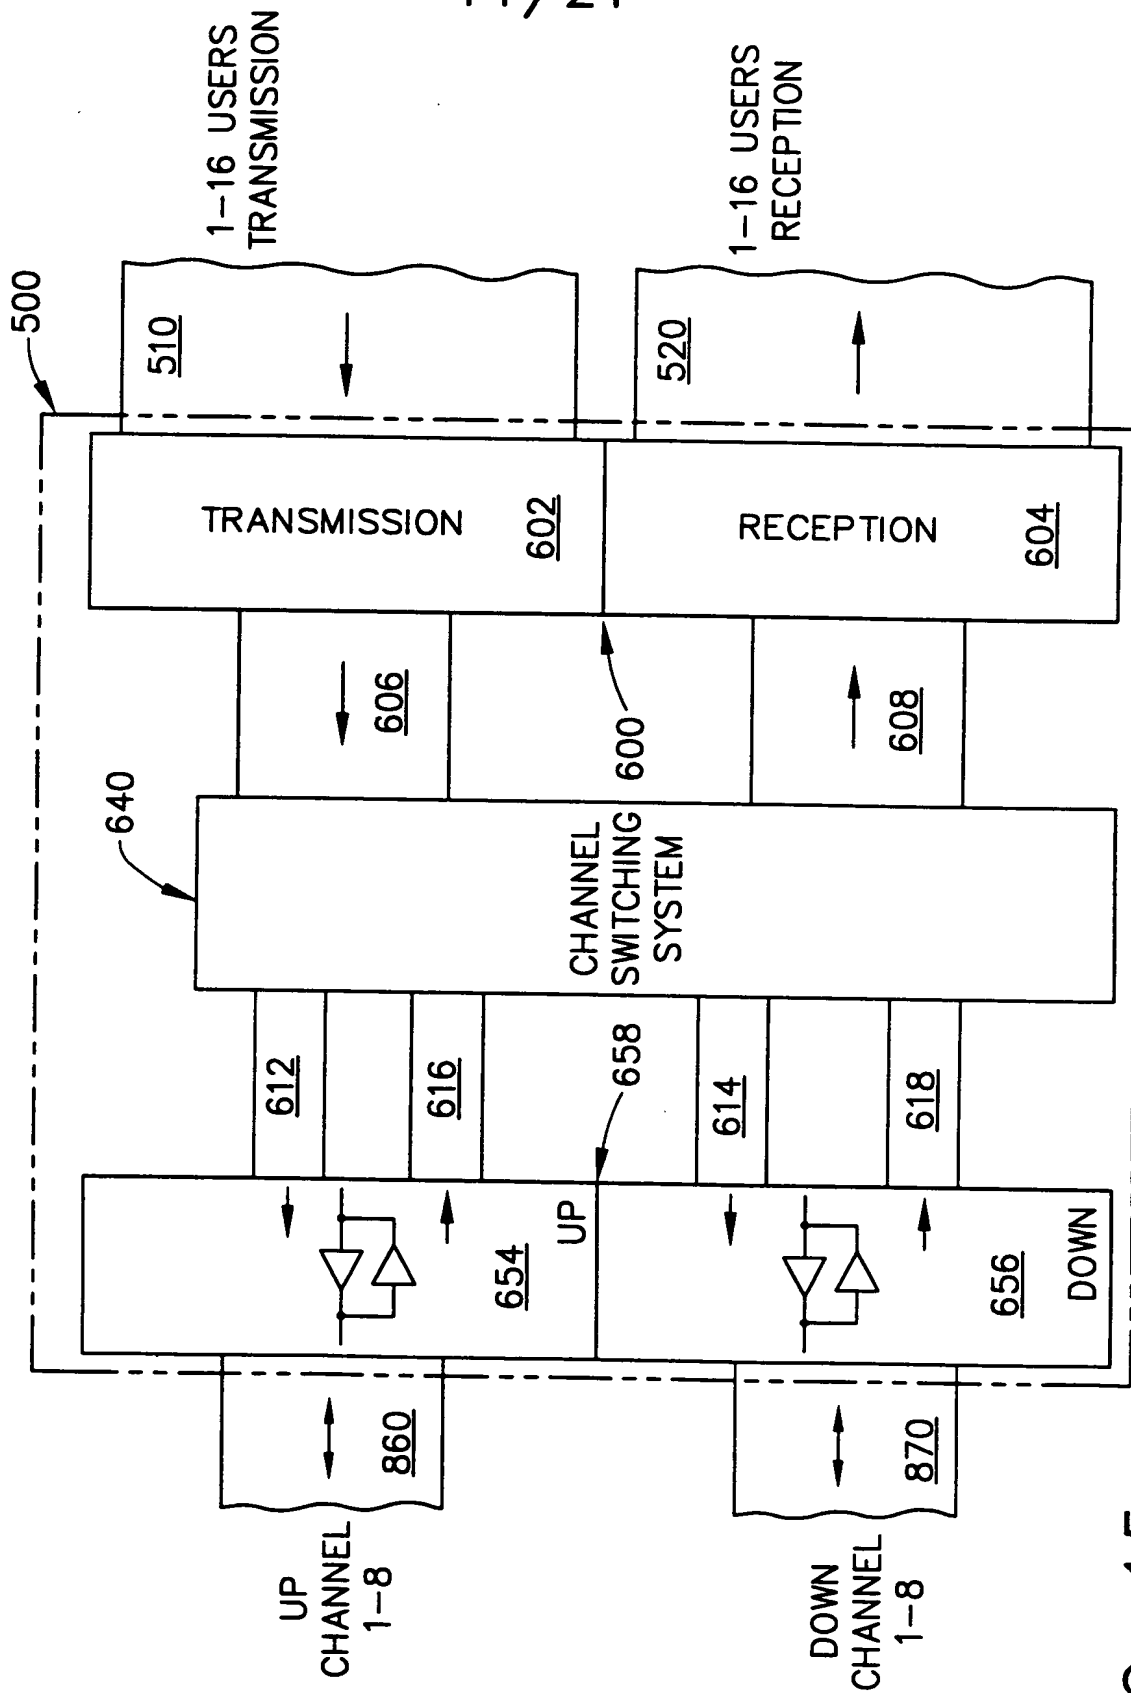

SUBSTITUTE SHEET (RULE 26)

FIG. 15

12/21

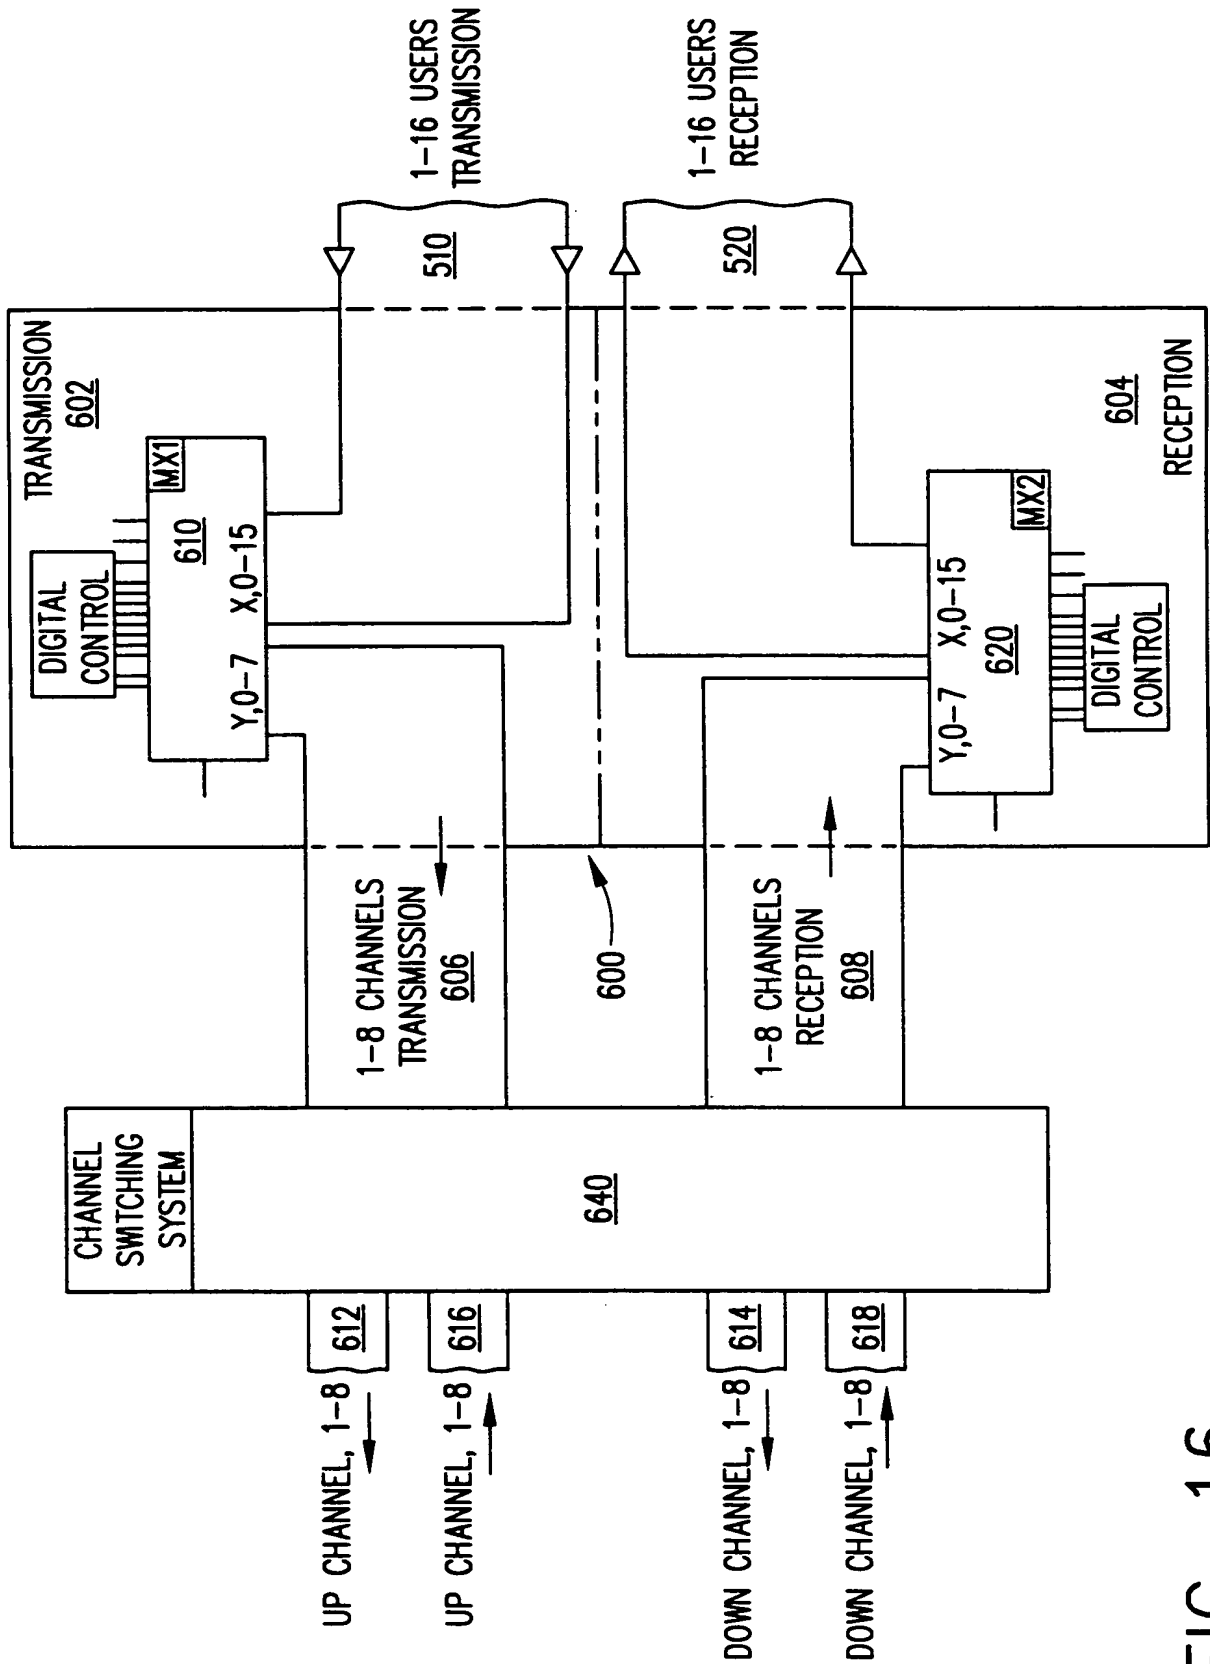


FIG. 16

13 / 2 1


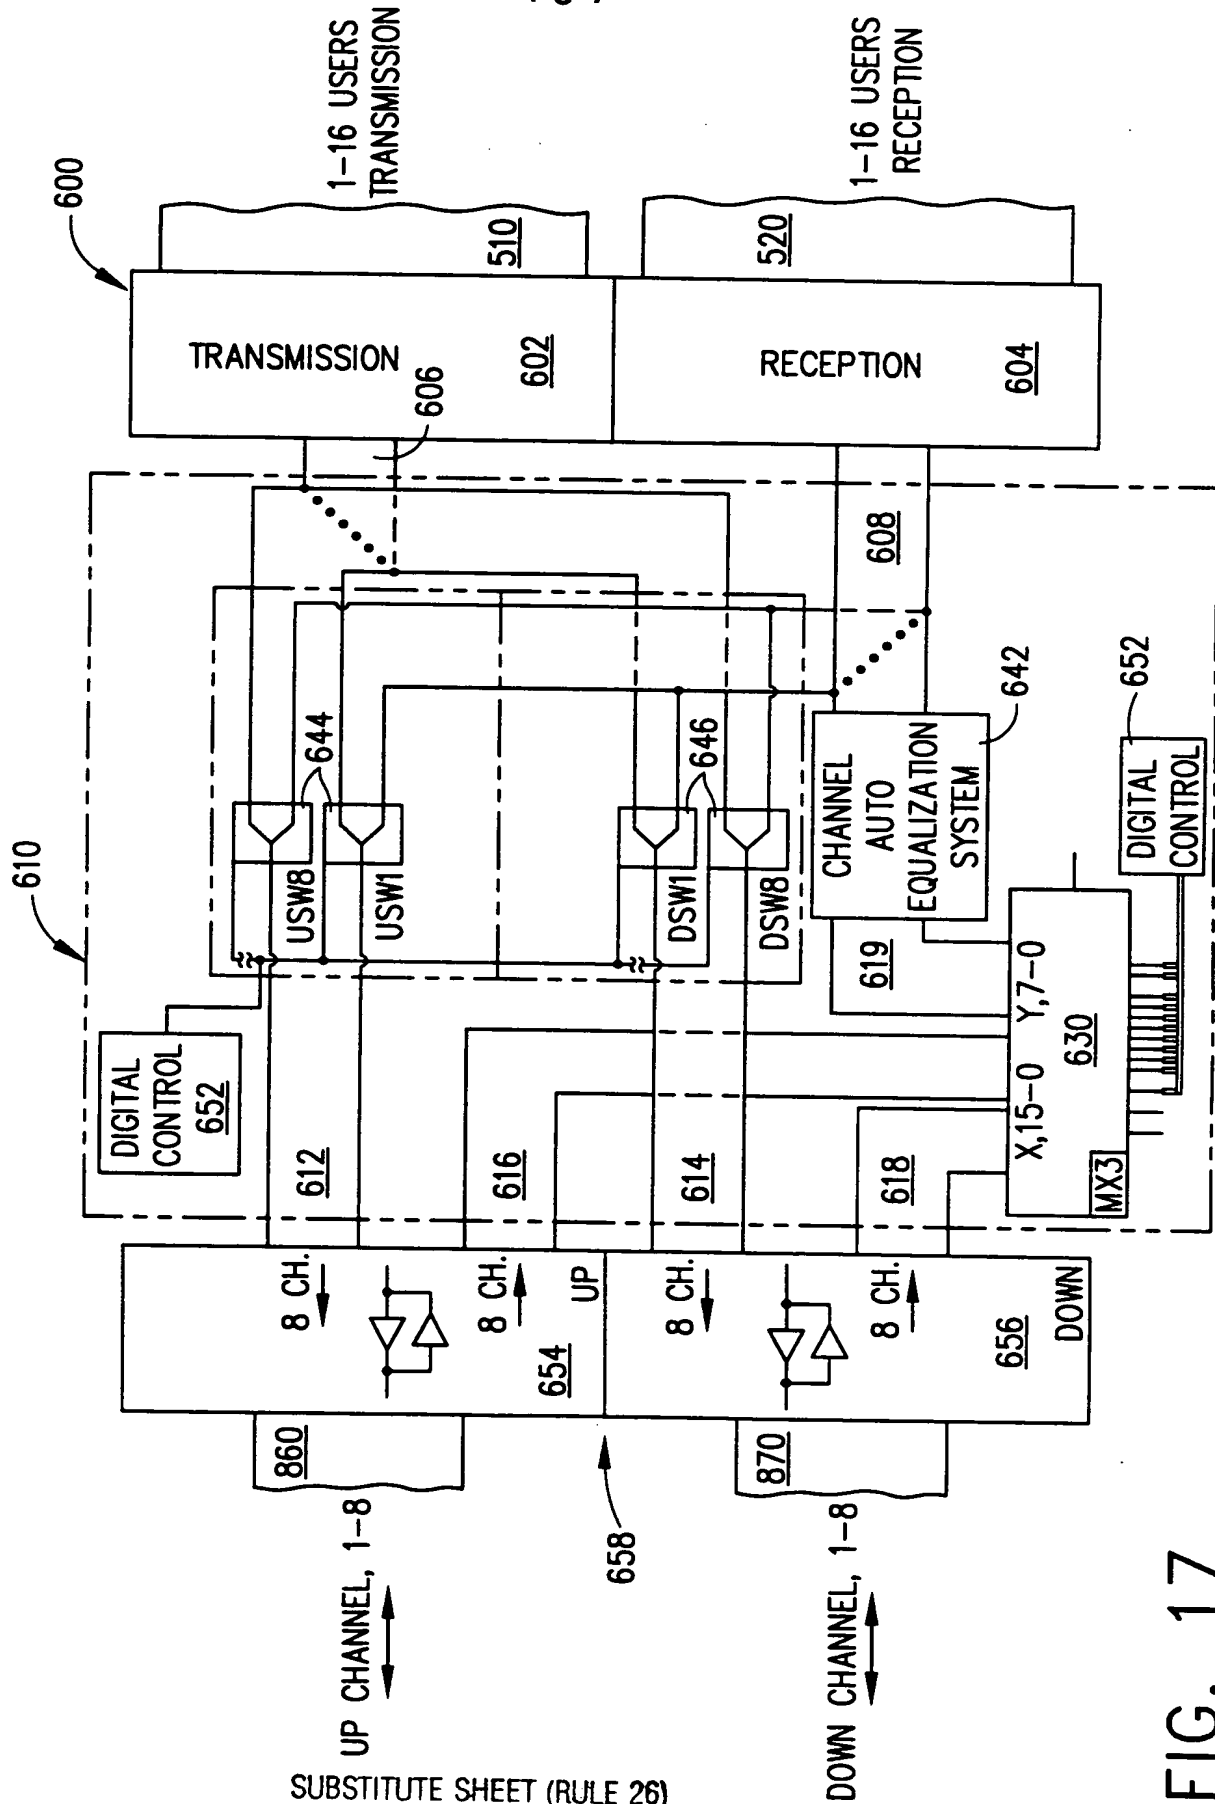


FIG. 17

14/21

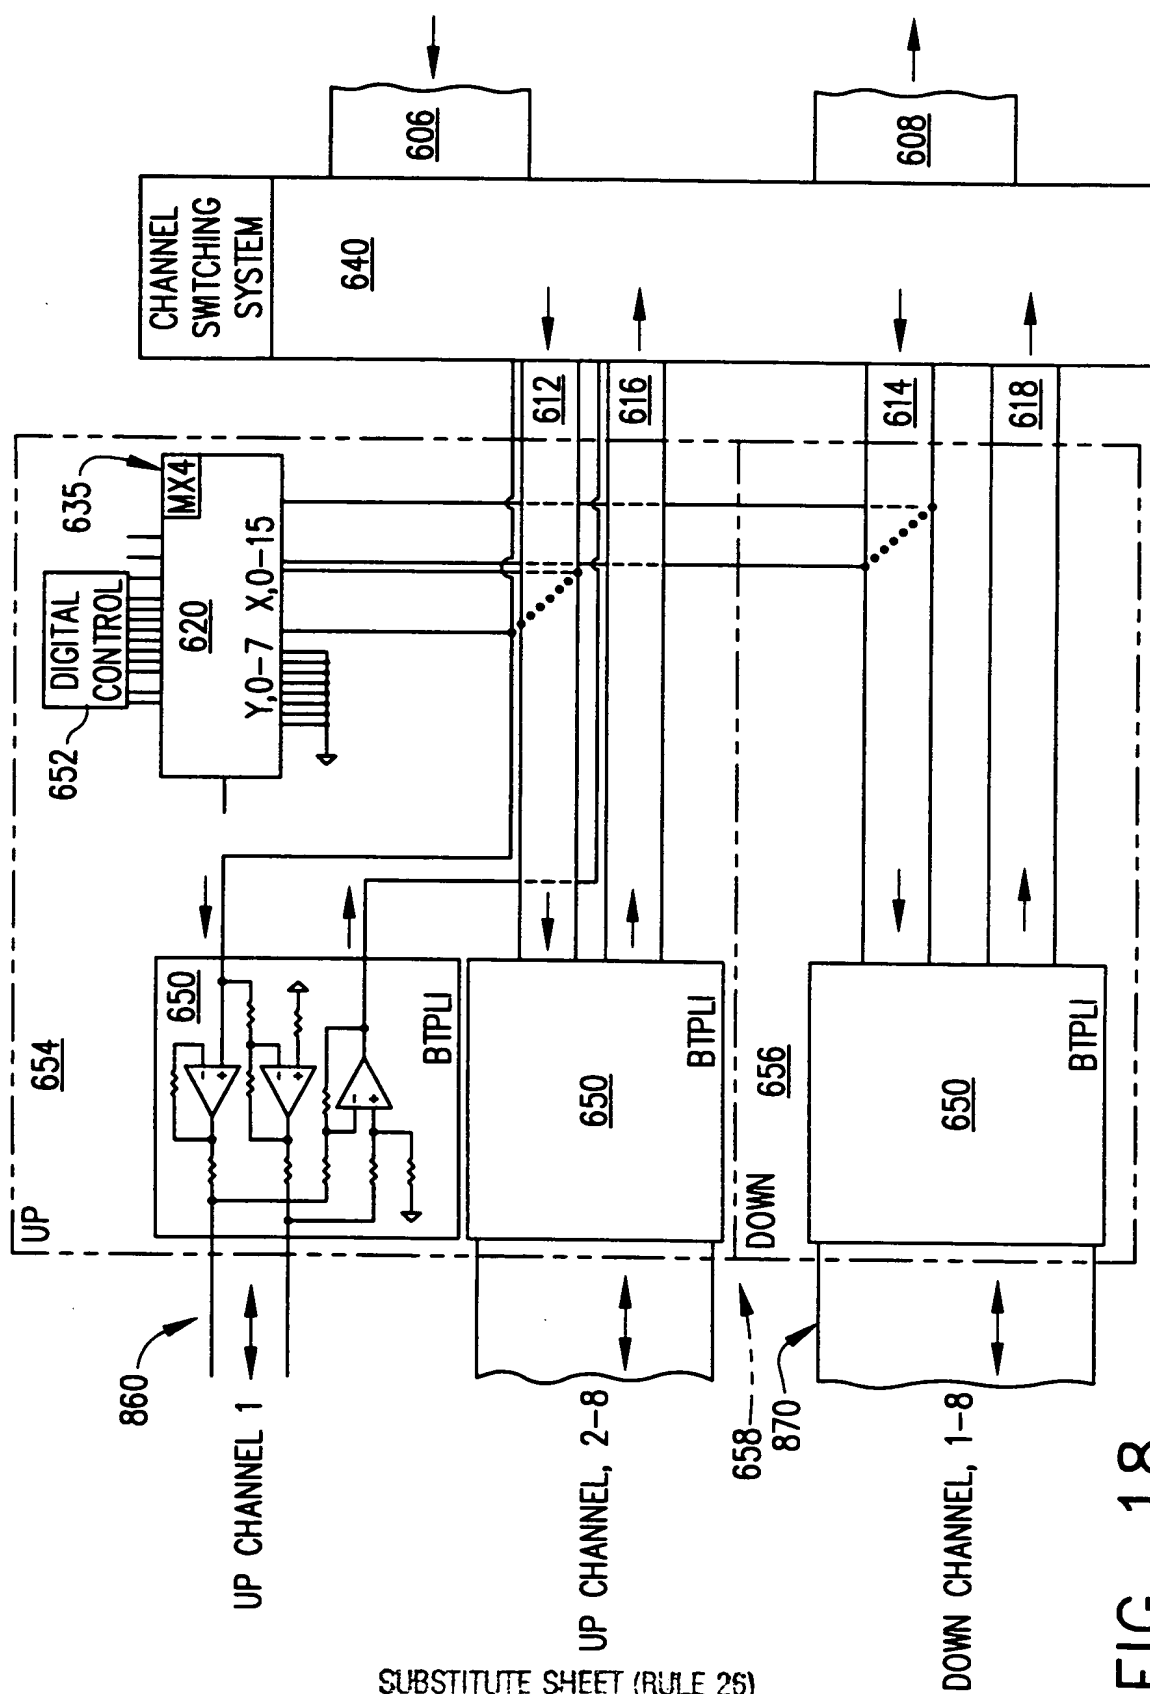

SUBSTITUTE SHEET (RULE 26)

FIG. 18

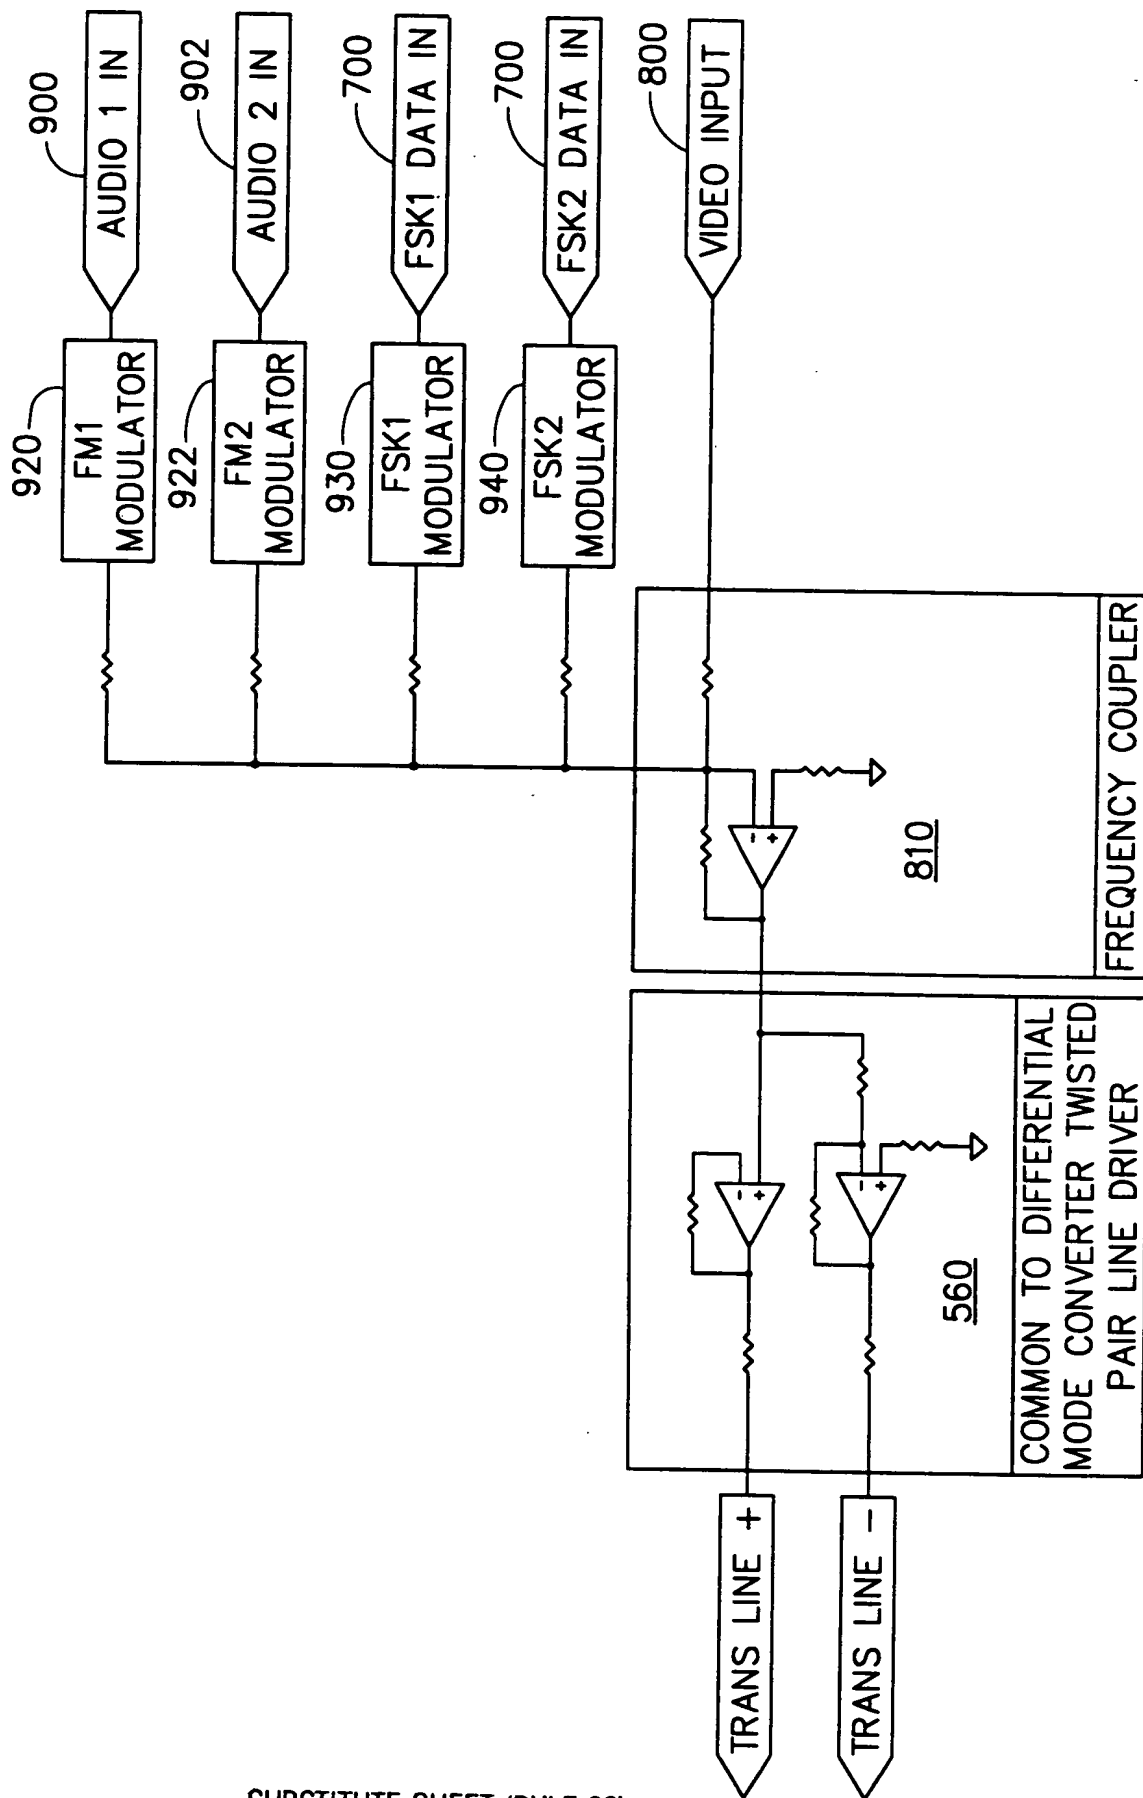


FIG. 19

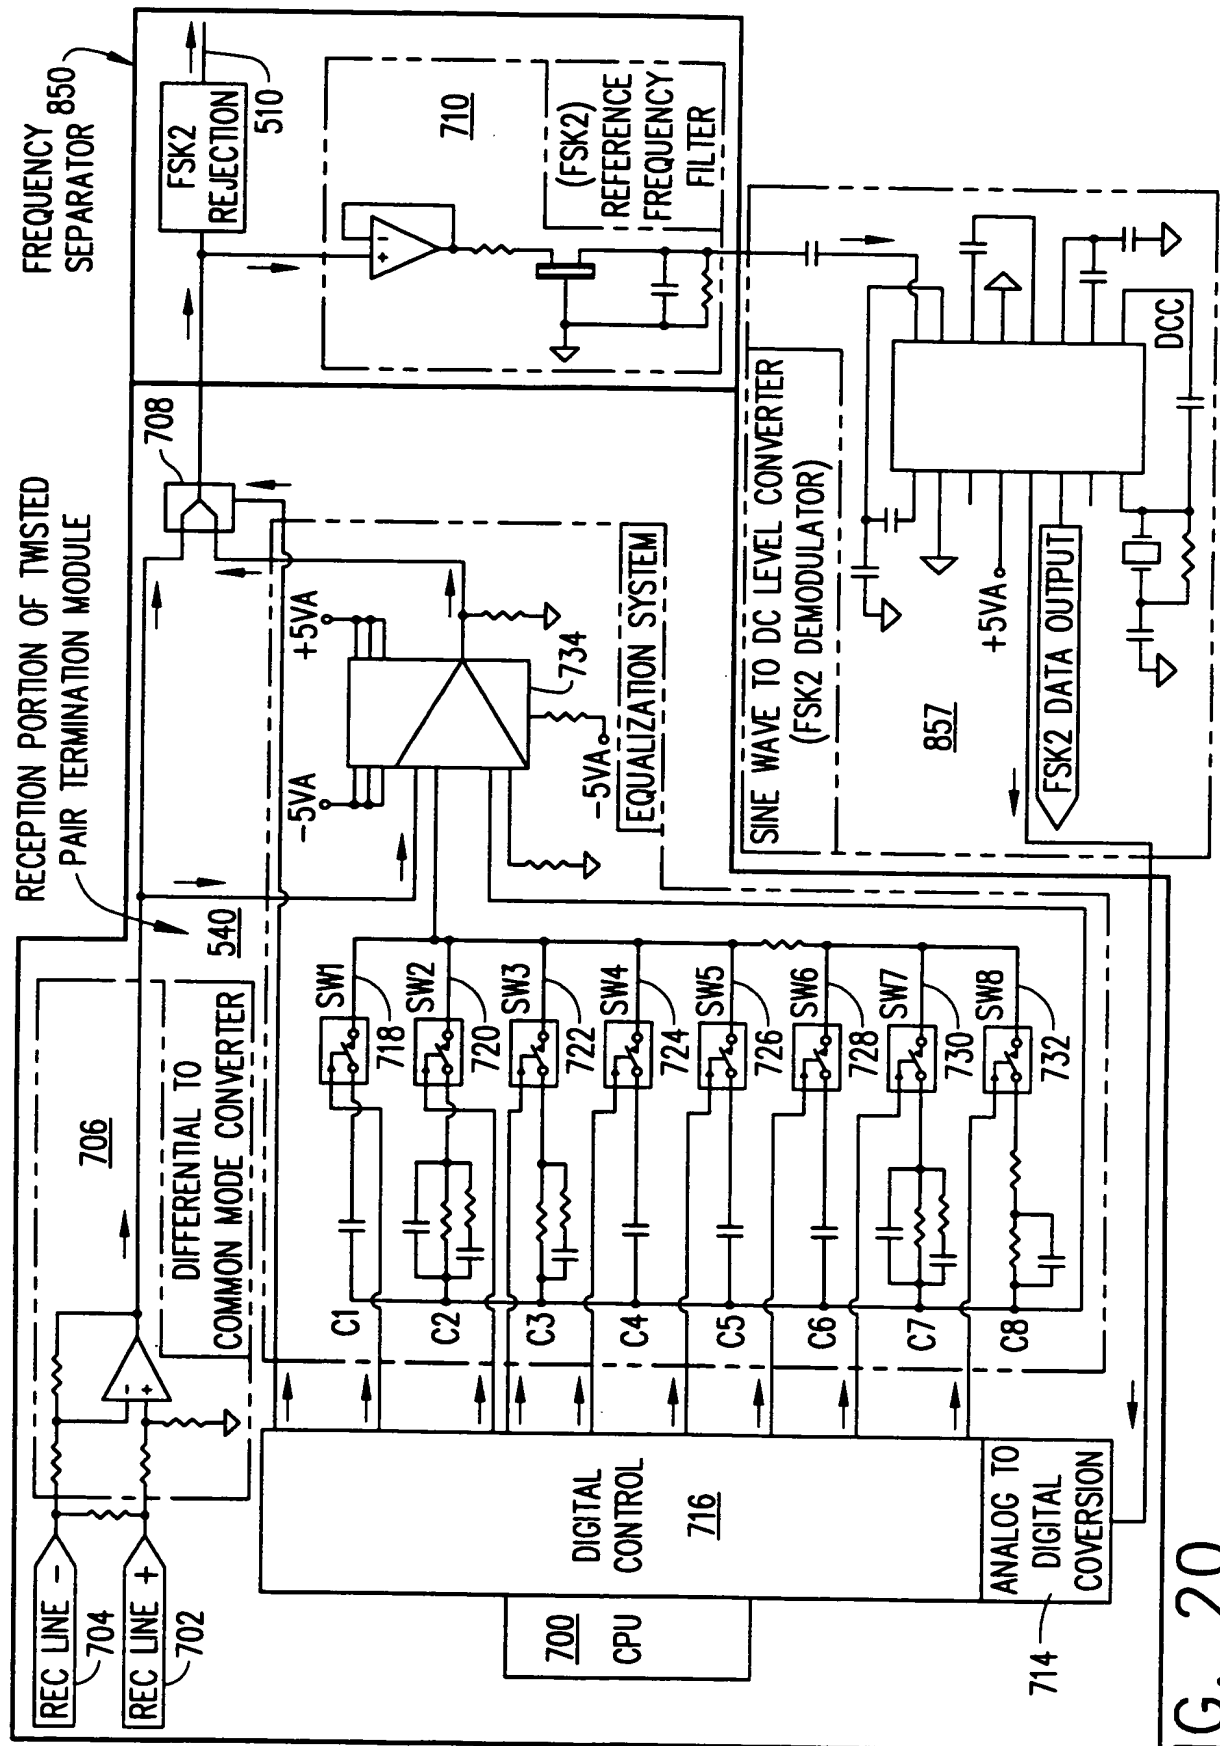


FIG. 20

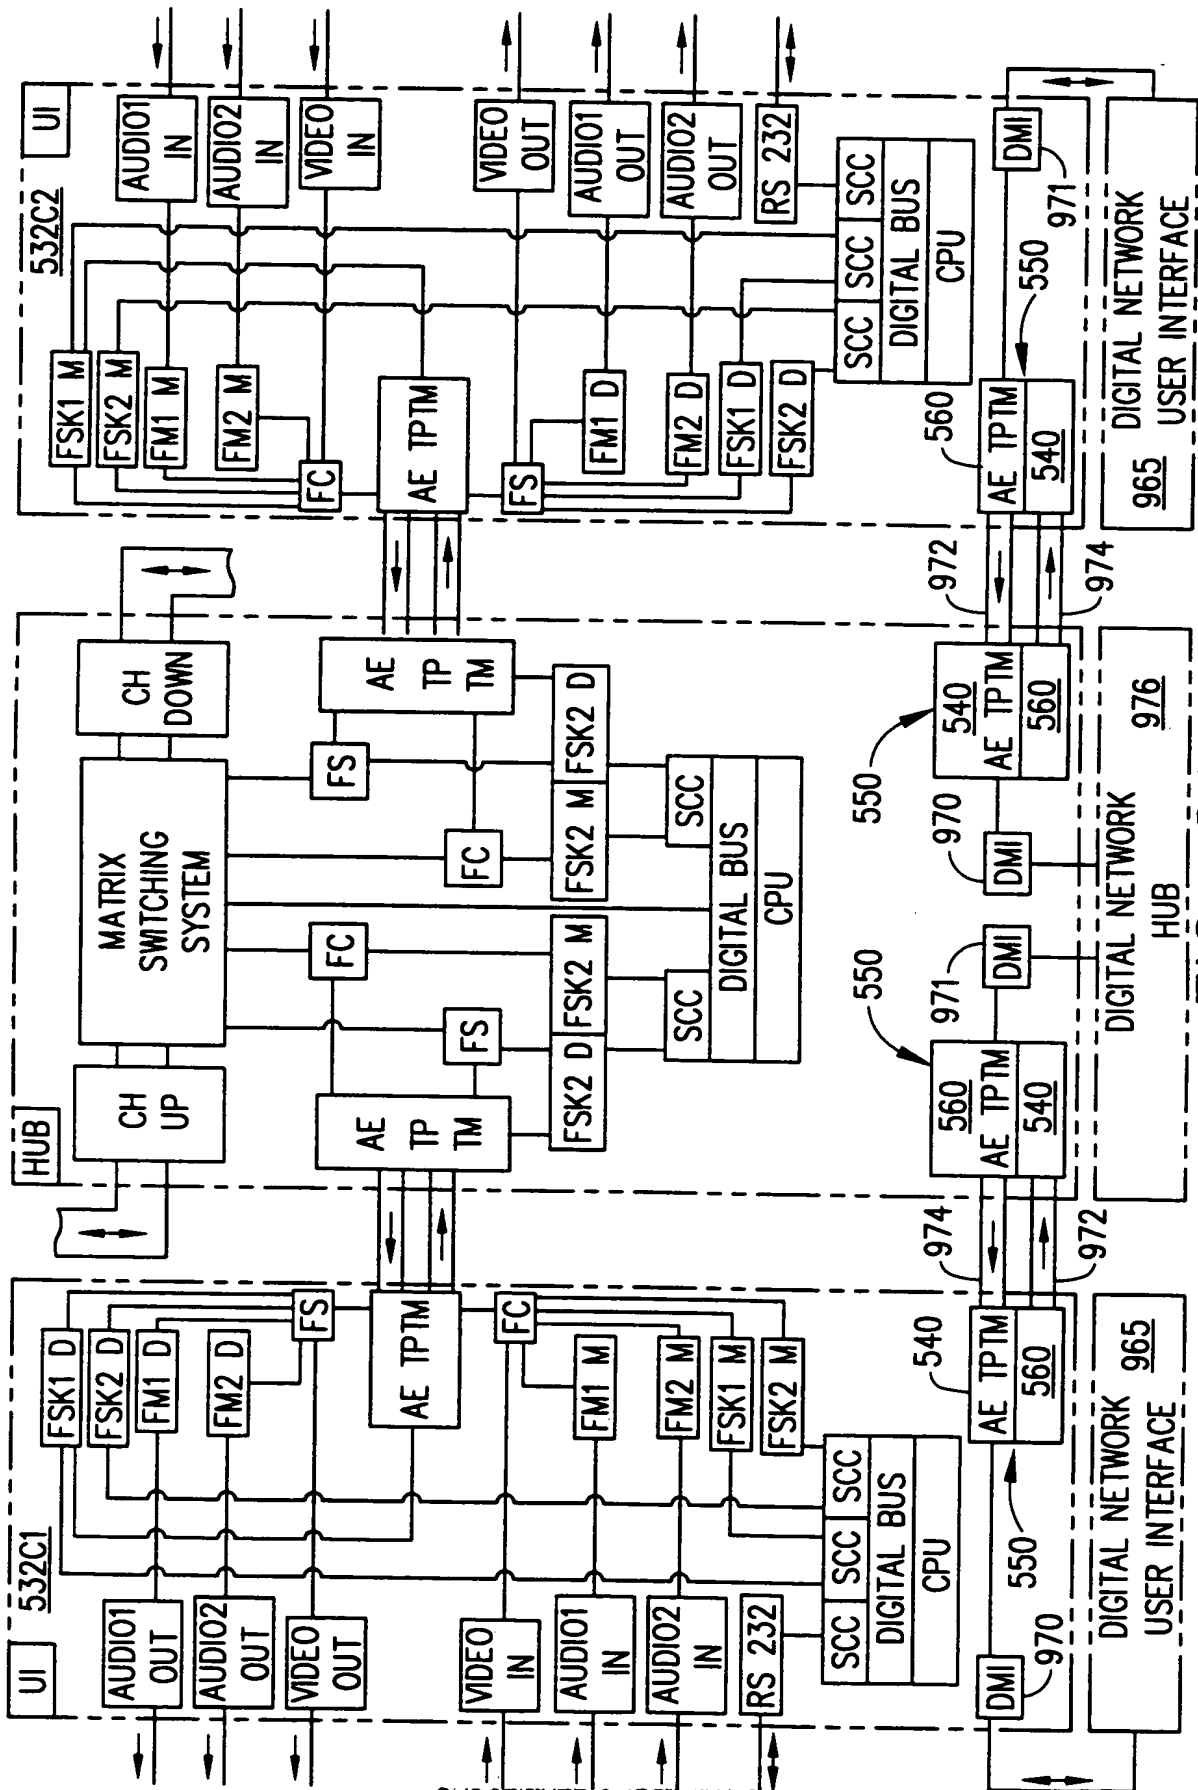


FIG. 21

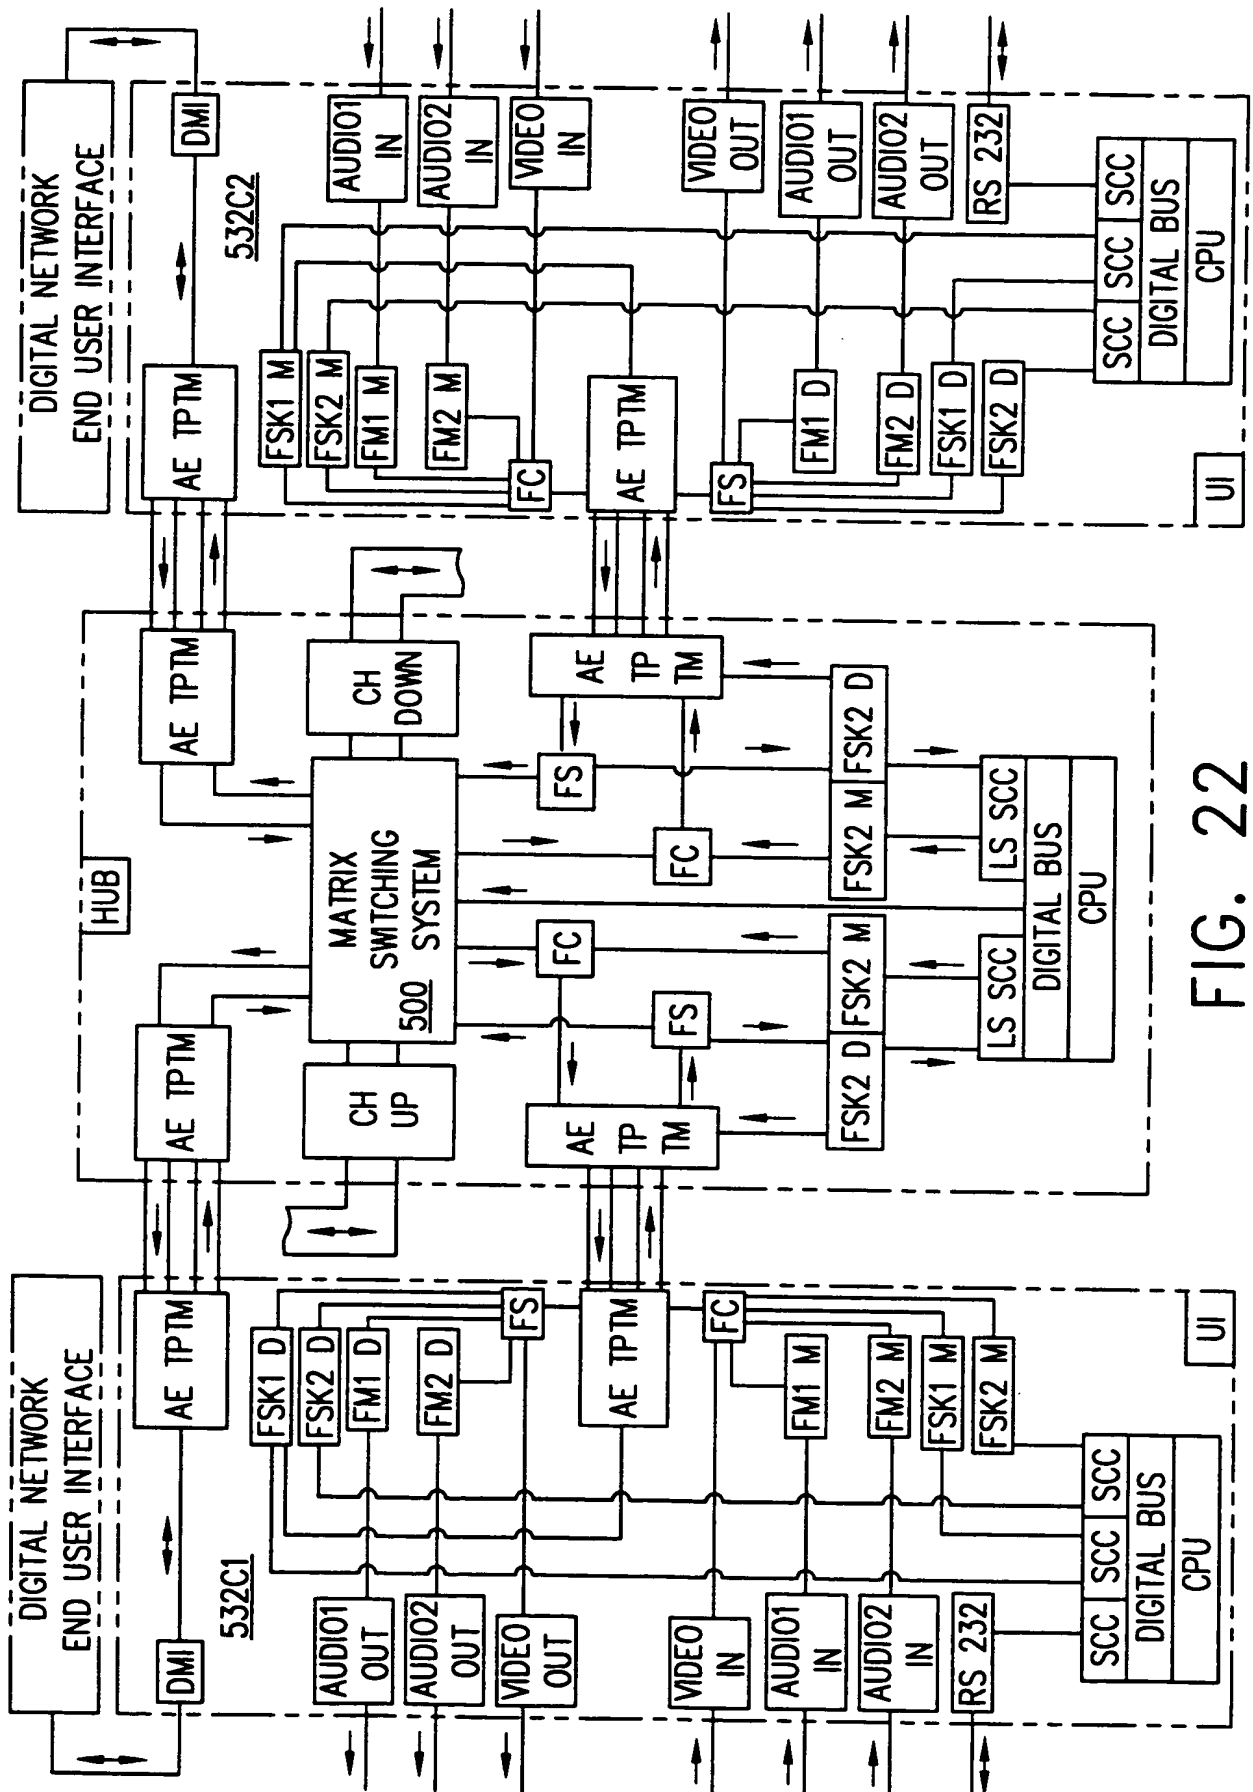


FIG. 22

19/21

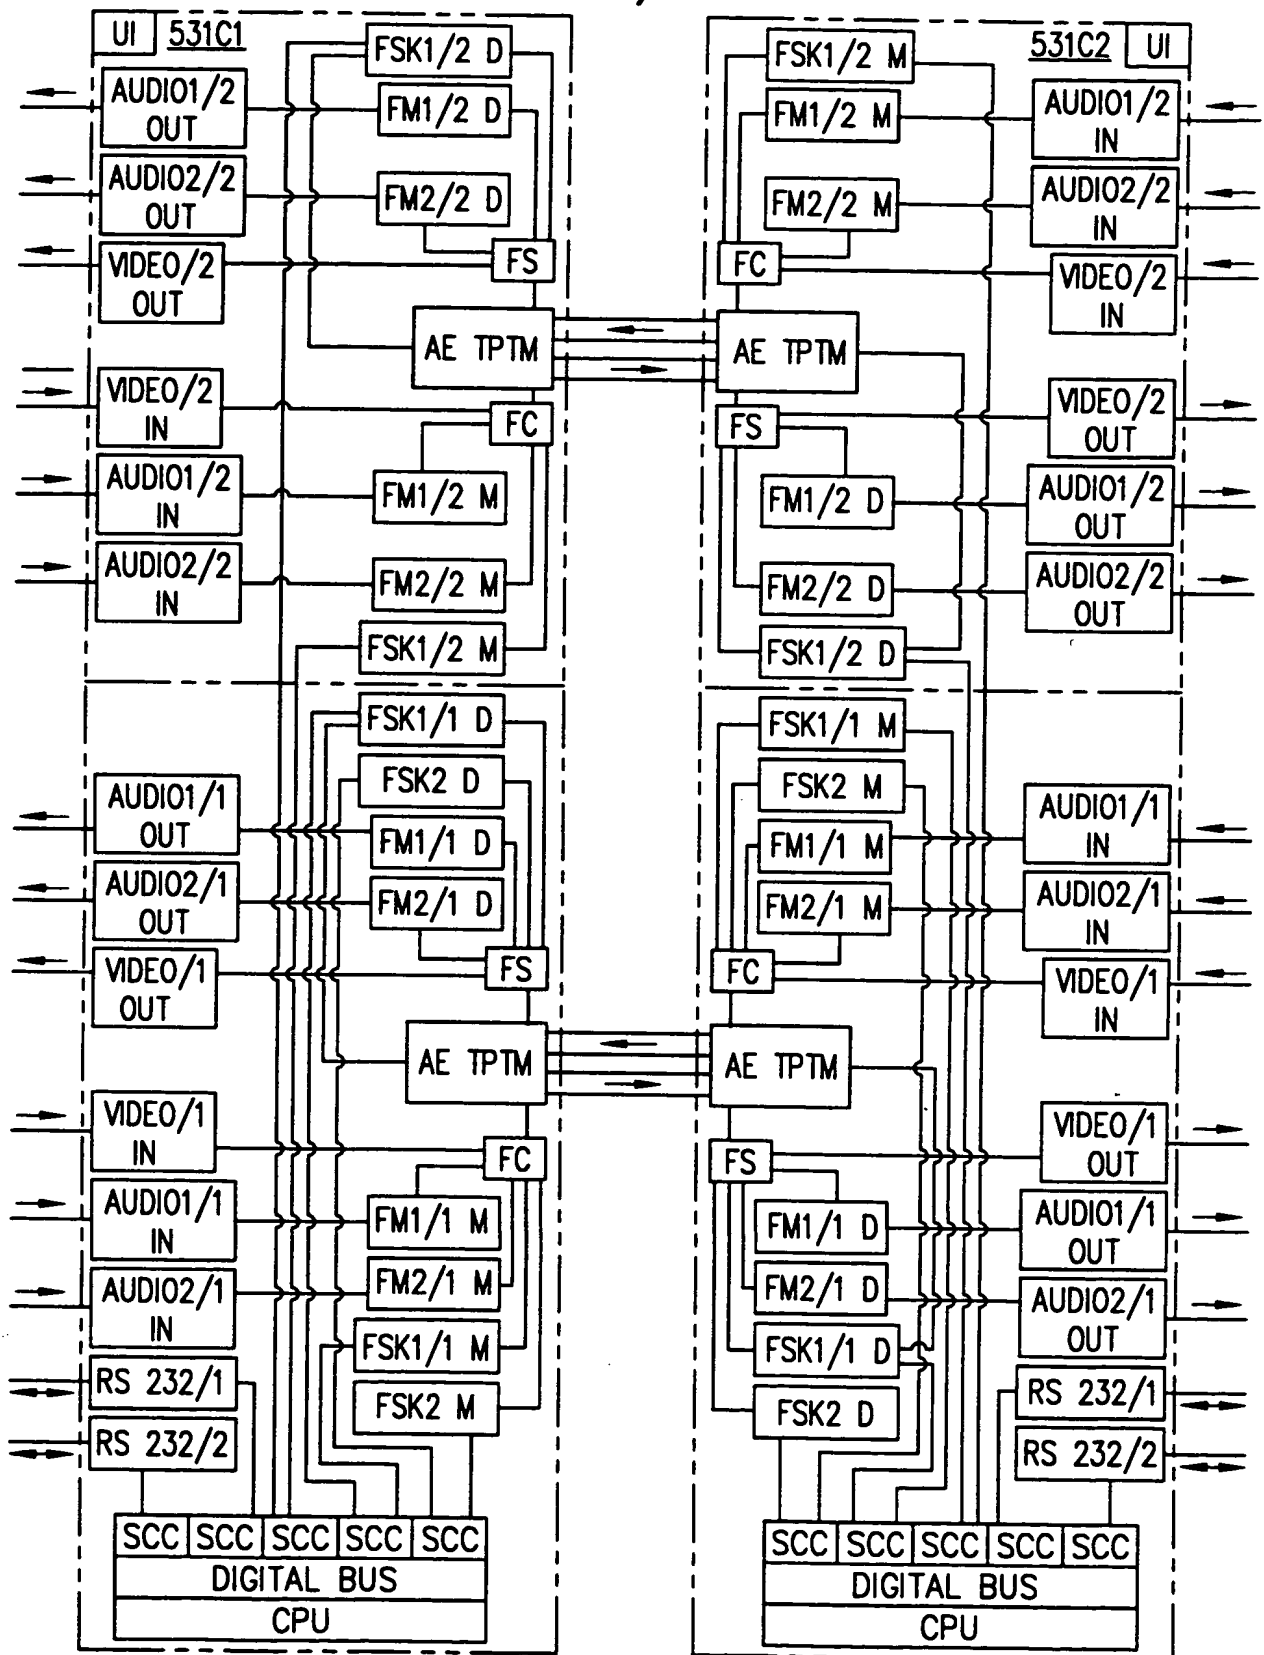


FIG. 23

SUBSTITUTE SHEET (RULE 26)

20 / 2 1

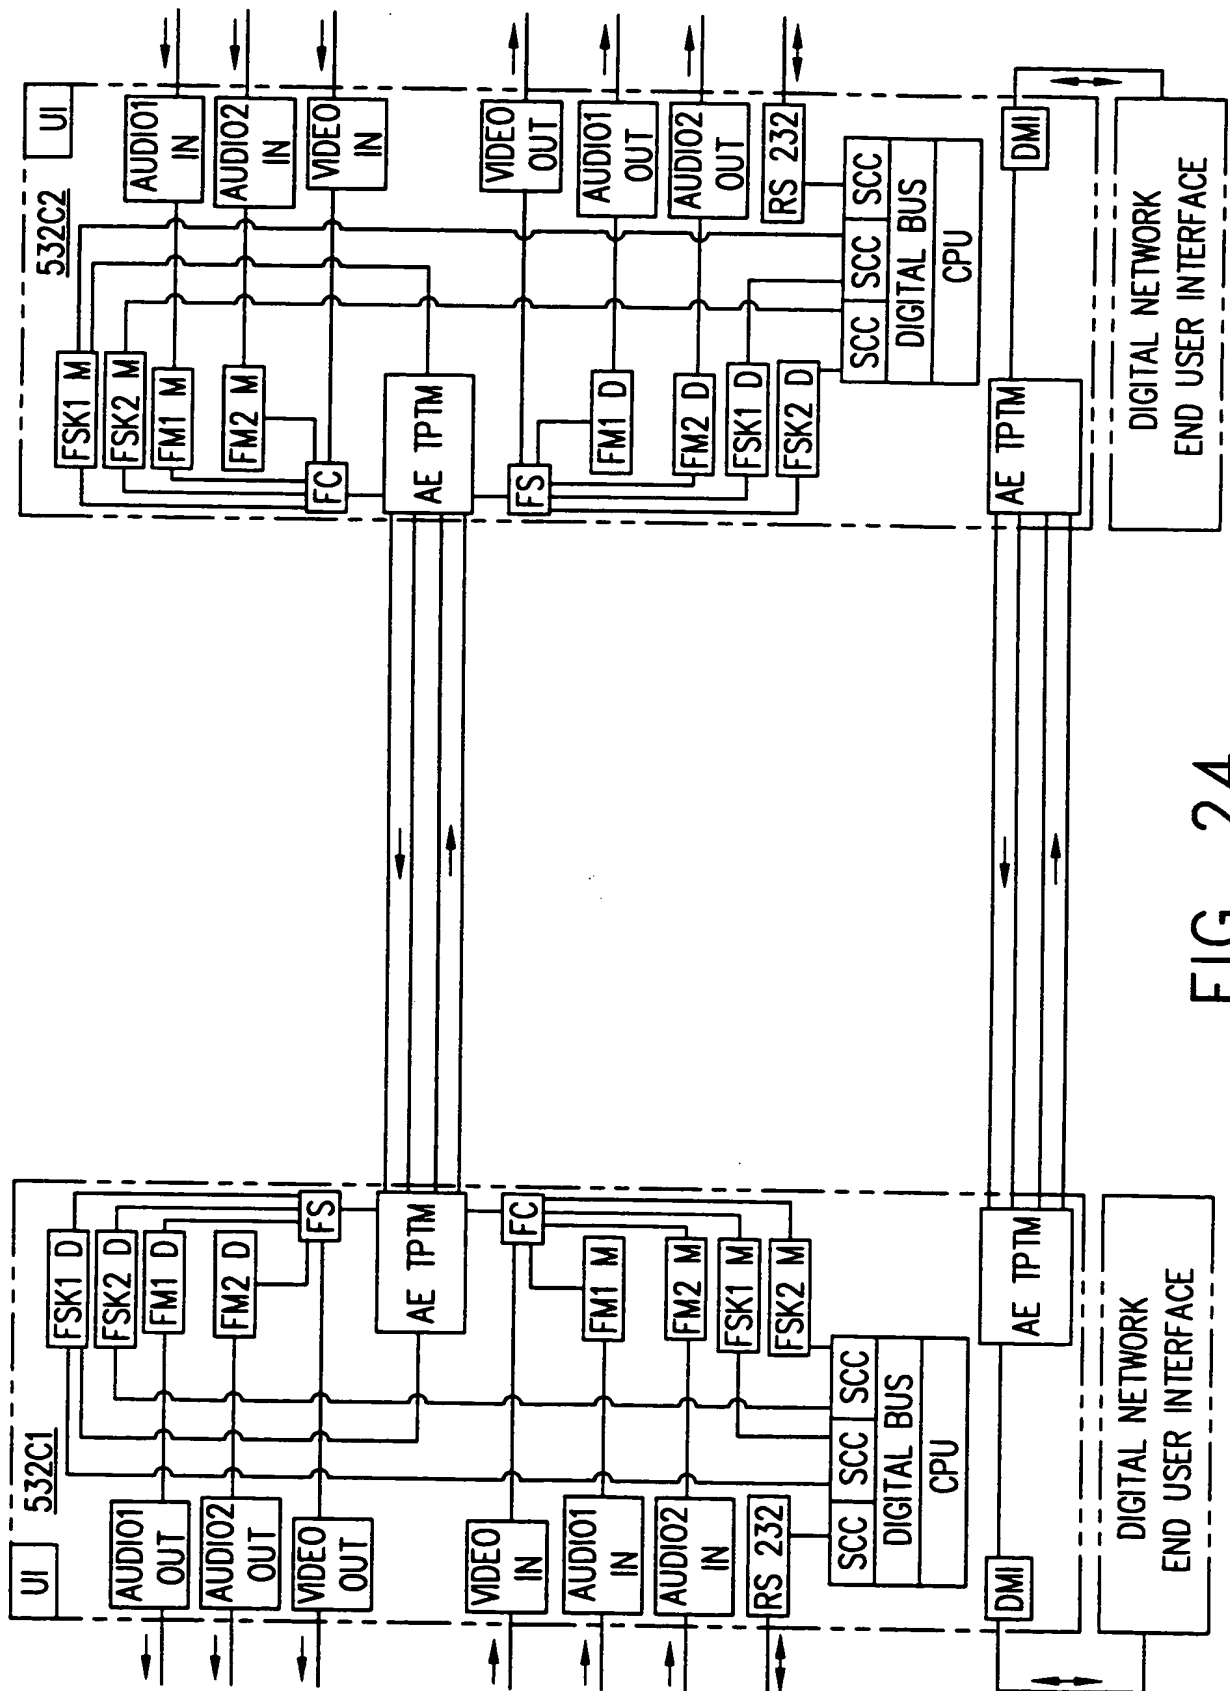


FIG. 24

21 / 2 1

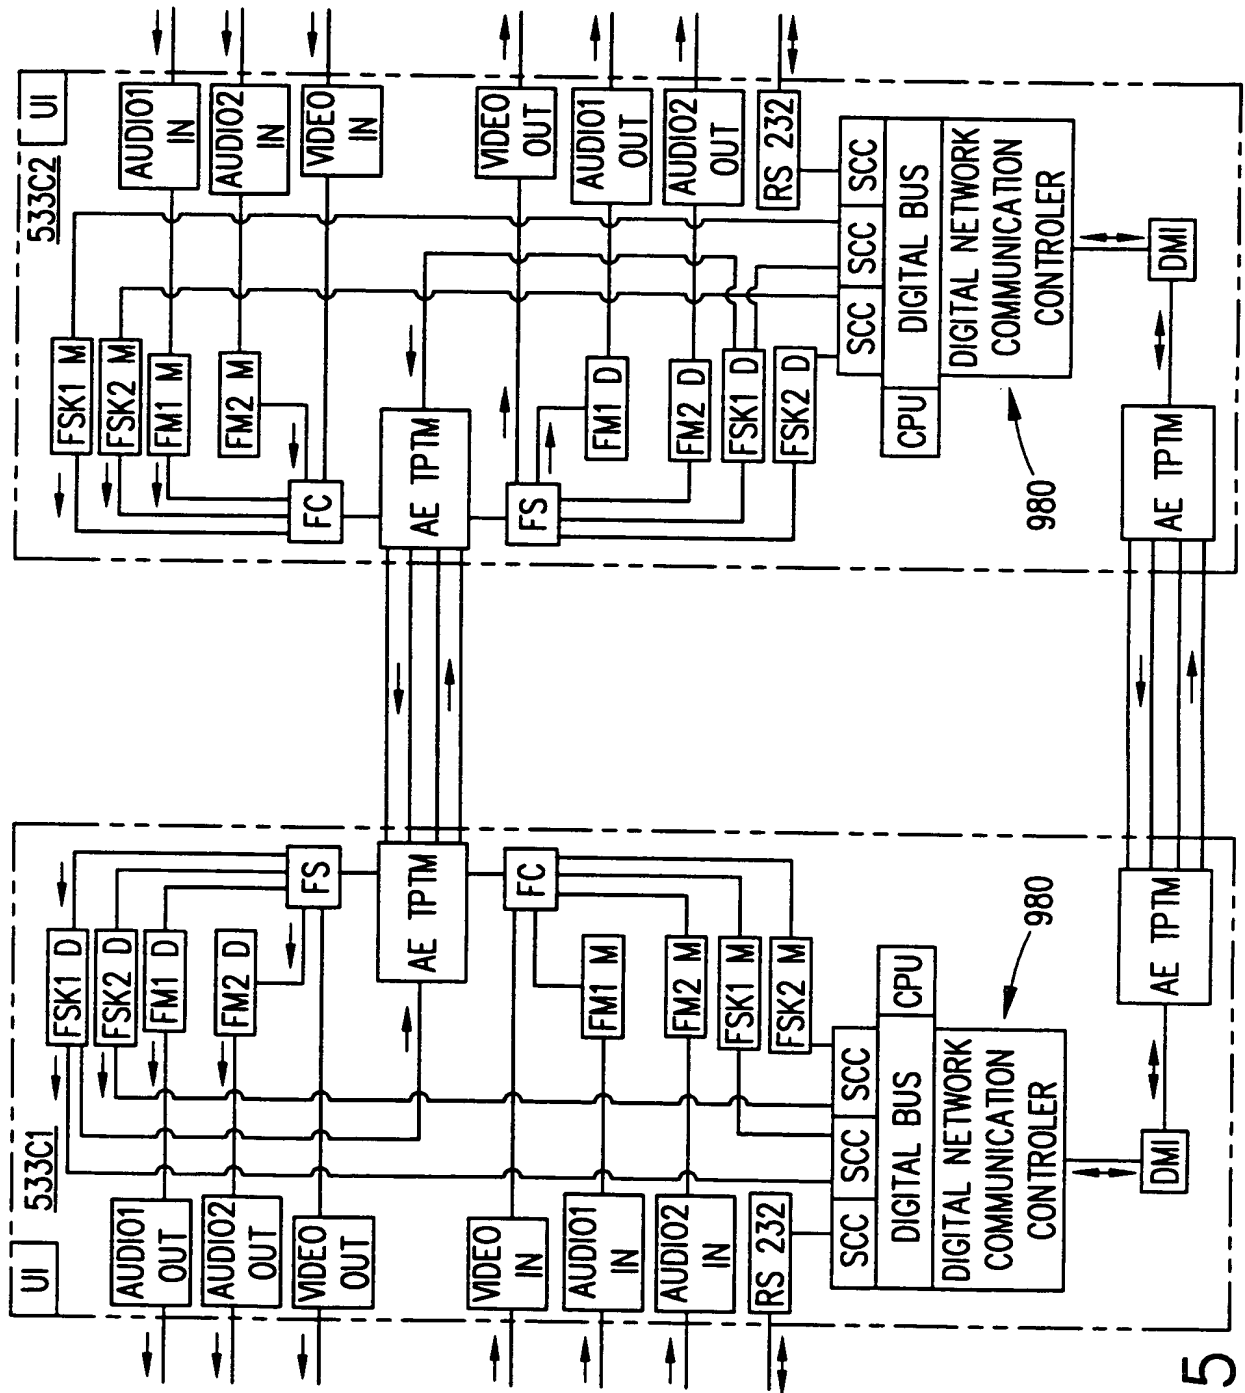


FIG. 25

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/14 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	IEEE INFOCOM '92, PROCEEDINGS, vol.2, 1992, FLORENCE, IT pages 876 - 885	1,5
A	BIANCHINI ET AL. 'DESIGN OF A NONBLOCKING SHARED-MEMORY COPY NETWORK FOR ATM' see the whole document	2-4,6-13
Y	IEEE TRANSACTIONS ON COMMUNICATIONS, vol.39, no.8, August 1991, NEW YORK, US pages 1286 - 1274	1,5
A	YUM 'HIERARCHICAL DISTRIBUTION OF VIDEO WITH DYNAMIC PORT ALLOCATION' see the whole document	2-4,6-13
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

24 January 1995

Date of mailing of the international search report

1 0. 02. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Greve, M

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	GB,A,2 094 592 (STANDARD TELEPHONES AND CABLES LIMITED) 15 September 1982 see page 1, line 5 - line 49 see page 2, line 84 - line 93 ---	10 1-4,6-8, 11,12
Y A	US,A,4 766 589 (FISHER) 23 August 1988 see abstract ---	10 11,12
A	REVIEW OF THE COMMUNICATIO LABORATORIES, vol.33, no.4, 1985, TOKYO, JAPAN pages 573 - 579 NAKAJIMA ET AL. 'BROADBAND SWITCHING SYSTEM' see the whole document ---	6-9,13
A	COMPUTER COMMUNICATIONS, vol.10, no.5, October 1987, LONDON, GB pages 256 - 262 BECKWITH 'LIVE-NET - AN INTEGRATED BROADBAND VIDEO AND DATA NETWORK' see the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int: International Application No

PCT/US 94/11722

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2094592	15-09-82	CH-A- 658963	15-12-86
		DE-A- 3204191	19-08-82
		US-A- 4477914	16-10-84

US-A-4766589	23-08-88	GB-A- 2161676	15-01-86
		AU-B- 572669	12-05-88
		AU-A- 4427285	16-01-86
		BE-A- 902853	13-01-86
		CH-A- 668874	31-01-89
		JP-A- 61112449	30-05-86
		SE-B- 465346	26-08-91
SE-A- 8503442	12-01-86		
